


## 3,0 kw Pump

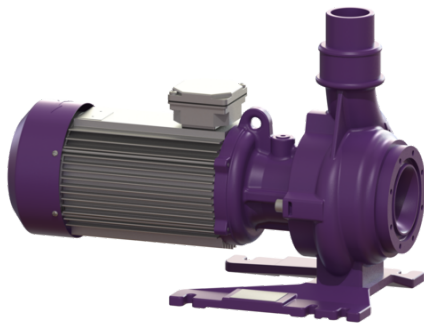

### Article information

Item no.: 917856  
 GTIN: 4026092055823  
 Price group: 90

### Description

General characteristics	
purchasable by service partner:	Yes
Dimensions	
Net weight:	55,5 kg
Gross weight:	57 kg
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Pumping device	
Pump control:	SPF 300 KE 2.0
Connection type:	Direct connection
Rated current:	6,2 A
Length of mains cable for pump:	5 m
Self-diagnosis system (SDS):	I
Protection class control unit:	IP 55
DSC:	integrated
Max. temperature (permanent) of conveyed material:	35 °C
Max. pumping height:	17 m
Speed:	2850 U/min
Power P1:	3,6 kW
Power P2:	3 kW
Operating mode:	S2 - 30 min.
Type of fuse required (electrical protection):	Fuse protection through control unit 400 V
Type of pump connection cable:	H07RN-F 7G 1.5 mm <sup>2</sup>
Impeller type:	Radial impeller with macerating system
Control	
Mains frequency:	50 Hz
Operating voltage:	400 V

Connection type:  
Rated current:

Direct connection  
6,2 A