


Pumping station *Aqualift S Basic*

The economic version for wastewater without sewage.

The pumping station *Aqualift S Basic* makes looking for an economic alternative child's play as far as the disposal of wastewater without sewage outside buildings is concerned. It provides cutting-edge technology at an unbeatable price, housed in a sturdy installation chamber.

The pumping station *Aqualift S Basic* is available either as a Mono or Duo system in two different pumping sizes. It is equipped with a float switch and a control unit (Tronic version).

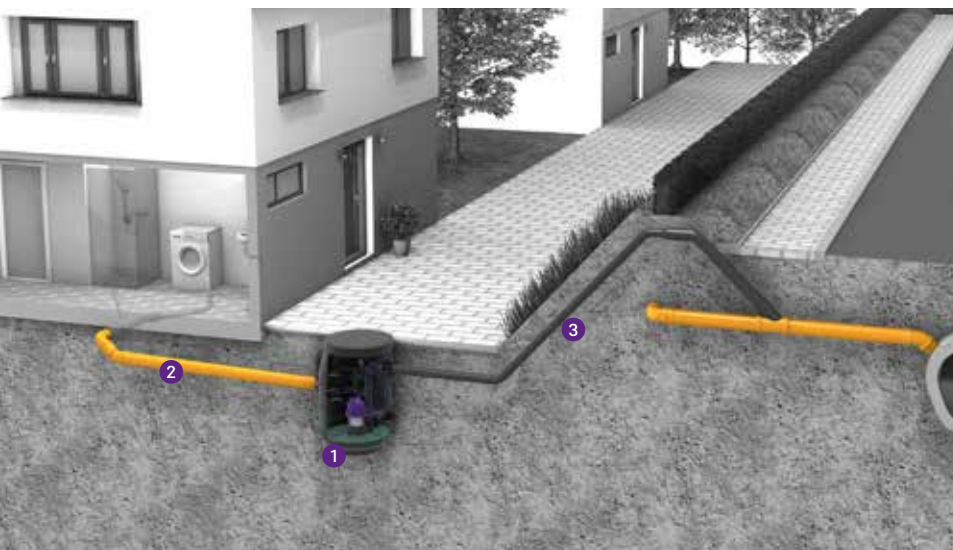

1 Pumping station 2 Inlet connection 3 Pressure pipe

100% waterproof and odour-tight

Like all KESSEL installation chambers, the tank of the pumping station *Aqualift S Basic* is absolutely waterproof and odour-tight and is covered by our guarantee, which we have voluntarily extended to 20 years.

Flexible pump(s)

The pumping station has either one or two freely suspended pumps of the type GTF 600 or GTF 1250. Noise levels during operation are reduced by decoupling from the tank body.

Tool-free maintenance

The pump can be removed and serviced very easily thanks to the quick-release closures.

Variable upper section

The optional upper section is inclinable and height adjustable from 140 to 440 mm.