

Backwater valve

The Universal

The versatile drain with backwater valve.

It couldn't be more flexible. *The Universal* is a versatile basement drain for sewage free wastewater. It is equipped with a backwater valve and a manually lockable emergency closure. *The Universal* has three inlets as a standard feature (two in Ø 50 and one in Ø 75 mm), the telescopic upper section is also rotatable, tiltable and height-adjustable. This ensures it provides maximum flexibility for the design and installation. *The Universal* is optionally available with a slotted grating made of polymer or stainless steel.



1 Drain 2 Inlet 3 Steel cover

Backwater valve *The Universal*

For installation in a concrete floor/slab



CE EN 13564 Type 5

Made in PP. With lateral outlet 2.5°, 2 inlets Ø 50, 1 inlet Ø 75 mm with blind plug, odour trap and sludge trap.

With/without twin flap backwater valve.


Drainage capacity 1.8 l/sec flow rate.

Sealing water height 60 mm.

Installation area 400×320 mm

Cover:

Slotted cover 188×188 mm made of polymer, black, class K 3;
slotted cover 187×187 mm and rim made of stainless steel AISI 304, screwed, class L 15

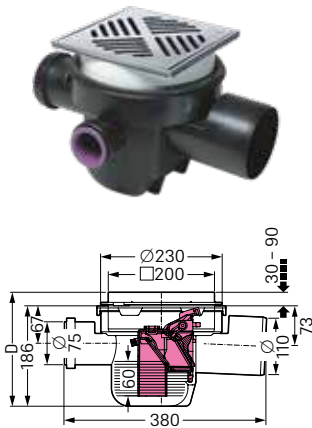

With twin flap backwater valve

Outer diameter Ø (mm)	Installation depth D in mm	Art. no.
With black cover		
Ø 110	216 - 276	27 611
With stainless steel cover		
Ø 110	216 - 266	27 621

Without twin flap backwater valve

Outer diameter Ø (mm)	Installation depth D in mm	Art. no.
With black cover		
Ø 110	216 - 276	29 111
With stainless steel cover		
Ø 110	216 - 266	29 121

➤ **Accessories:** see pages 275 – 279