

Data sheet

Lifting station Aqualift XL 300l Mono, SPF 1400-S3



Article information

article number: 11009
 EAN code: 4026092056769
 Price group: 50

Product advantages

- Different performance classes available
- Pressure sensor for reliable pneumatic level measurement
- Maximum operating reliability due to intelligent control unit (Duo)

Description

The lifting station for faecal and faecal-free wastewater is equipped with one or two submersible pumps and a backflow preventer. The collection tank made of permanently resistant polymer (PE) offers universal connection options and has a screwed access cover.

General features

Colour	black
Standard	EN 12050-1
Type of wastewater	with sewage
Installation situation	free-standing installation
System type	Mono

Version

Type of system	Single unit
Shut-off valve	without shut-off valve
Pressure pipe connection	vertical

Dimensions

Net weight	76.89 kg
Gross weight	96.89 kg
Packaging dimension: length	1650 mm
Packaging dimension: width	1150 mm
Packaging dimension: height	890 mm


Tank/drain body

Tank volume	300.00 l
-------------	----------

Pumping device

Pump	SPF 1400-S3
Number of pumps	1
Operating mode	S3 - 50 %
Impeller type	Multi-vane impeller
Free passage	40 mm
Length of mains cable for pump	5 m

Pumping capacity

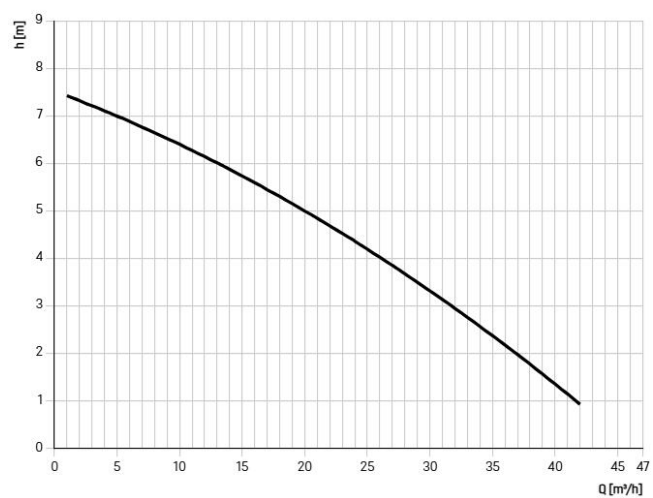

Control

Control unit

Level measurement instrument

Type of level measurement

Mains frequency

Operating voltage

Comfort

Immersion pipe

pneumatic

50 Hz

230 V