Data sheet

Replacement pump KTP/SPZ 1000 230 V, with float switch

Article information

article number: 28301
EAN code: 4026092038413
Price group: 90

Product advantages

Description

Replacement pump with macerator and float switch incl. Bracket for wastewater with sewage

General features

Standard	EN 12050-1
Type of wastewater	with sewage
Cable length	5 m

Version

Pump control	Float switch

Dimensions

Net weight	10.47 kg
Gross weight	10.8 kg
Packaging dimension: length	379 mm
Packaging dimension: width	326 mm
Packaging dimension: height	293 mm

Pumping device

Pump	SPZ 1000
Connection type	Schuko (earthed contact) 2-pin
Operating voltage	230 V
Mains frequency	50 Hz
Protection class	I
Insulation class	F
Cos phi - power factor	0.97
Protection class (pump)	IP 68 (3m/48h)
Temperature monitoring	integrated
Max. temperature (permanent) of conveyed material	35 °C
Max. pumping height	10 m
Speed	2800 U/min
Power P1	1.2 kW
Power P2	0.7 kW
Operating mode	S3 - 50 %
Type of pump connection cable	H07RN-F 3G 1.5 mm²
Type of fuse required (pump)	C 16 A
Length of mains cable for pump	5 m
Rated current	5,2| A

Pumping capacity

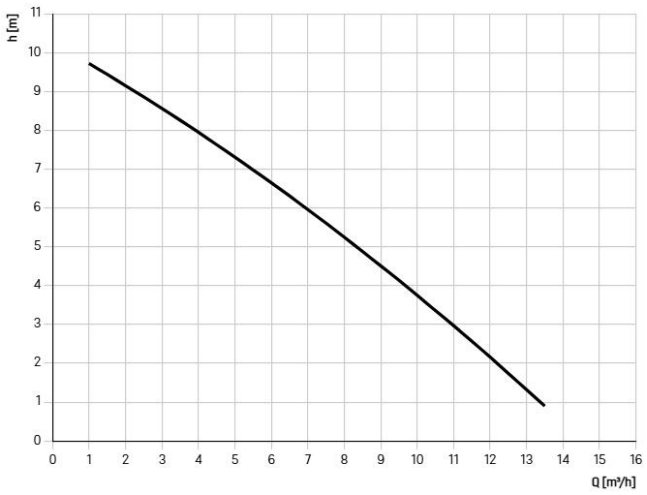

Control

Operating voltage	230 V
Connection type	Schuko (earthed contact) 2-pin