Data sheet

The Ultraflat 79 floor drain DN 50, Variofix, slot grat., screwed

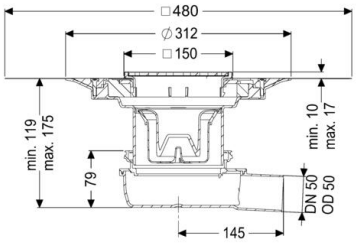

Article information
article number: 44700.51
EAN code: 4026092080931
Price group: 10

Product advantages
- Low installation depth
- Scientifically confirmed sound insulation effect
- different design covers

Description
The Ultraflat 79 floor drain is suitable for indoor floor drainage. The polymer drain is equipped with a removable odour trap in the upper section.

General features

Standard	EN 1253-1
Nominal size (DN)	50
Outer diameter (OD)	50 mm
Odour trap	included
Sustainable	through the use of recycled material

Version

System	125
Seepage opening	optional
Waterproofing layer on the upper section	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including)	W3-I
Sealing water height	50 mm
Discharge rate (l/s) with 10 mm threshold	1.2
Discharge rate (l/s) with 20 mm threshold	1.3

Dimensions

Vertical adjustment	119|174 mm
Net weight	2.27 kg
Gross weight	2.27 kg
Type of height adjustability	vertically adjustable upper section
Length	312 mm
Width	312 mm
Height	79 mm
Packaging dimension: length	390 mm
Packaging dimension: width	190 mm
Packaging dimension: height	310 mm

Tank/drain body

Number of outlets	1
Material of drain body	ABS
Socket version	lateral

Coverage features

Type of cover	Slotted cover
Cover material	Stainless steel 14301
Colour of cover	silver
Width of cover	138 mm
Height of cover	9 mm
Length of cover	138 mm
Min. flooring height	9 mm
Surface	ground
Frame material	Stainless steel 14301
Locking	screwed
Load class	K 3 (EN 1253-1)
Rim width	150 mm
Rim length	150 mm
Max. flooring height	18 mm
Shape of upper section	square
Upper section material	ABS