Data sheet

Practicus floor drain press.seal. DN 70, horiz., Waterpr layer, Des grate

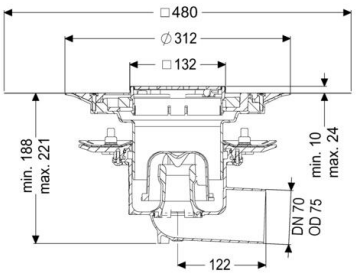

Article information

article number: 45179.53
EAN code: 4026092052471
Price group: 10

Product advantages

- Hygiene: hygienic, absolutely corrosion-free and durable material
- Sound insulation: outstanding sound insulation effect confirmed by the Fraunhofer Institute

Description

The Practicus polymer floor drain is used for point drainage and is equipped with a pressure sealing flange as well as a removable odour trap, a lip seal and a temporary protective cover. Including telescopic height-adjustable upper section made of ABS. The drain meets particular sound insulation requirements in accordance with the measurements of the Fraunhofer Institute in Stuttgart. The pressure sealing flange with bolts and screws made of stainless steel is used for the clamping or welding of bitumen and polymer bitumen sheets as well as for polymer and elastomer sealing sheets. The outlet socket is suitable for connection to SML cast iron pipes. With connection option for equipotential bonding.

General features

Standard	EN 1253-1
Nominal size (DN)	70
Outer diameter (OD)	75 mm
Odour trap	included
Sustainable	through the use of recycled material



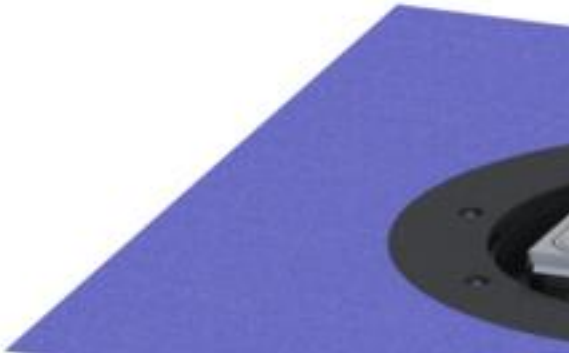

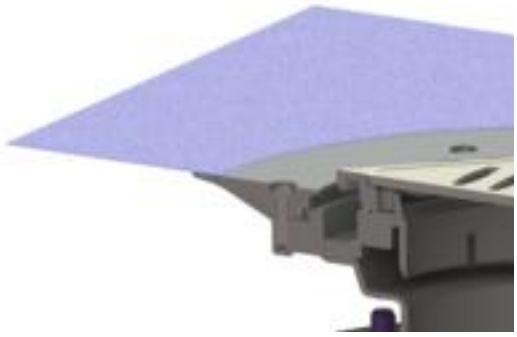

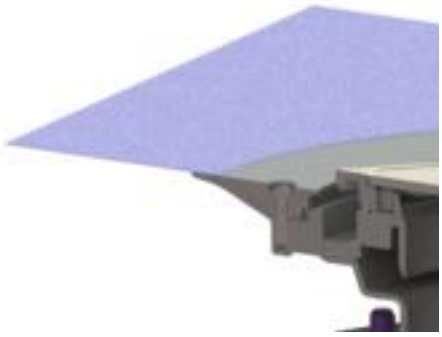

Version

System	125
Waterproofing layer on the upper section	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body	Press sealing flange (suitable for creating watertight seals)
Sealing water height	50 mm
Discharge rate (l/s) with 20 mm threshold	1.5

Dimensions

Vertical adjustment	10|23 mm
Net weight	2.67 kg
Gross weight	3.63 kg
Type of height adjustability	vertically adjustable upper section
Length	273 mm
Width	273 mm
Packaging dimension: length	586 mm
Packaging dimension: width	386 mm
Packaging dimension: height	400 mm

Tank/drain body

Number of outlets	1
Material of drain body	PP
Socket version	lateral

Coverage features

Type of cover	Design cover
Cover material	Stainless steel 14301
Colour of cover	silver
Width of cover	120 mm
Length of cover	120 mm
Surface	ground
Frame material	Stainless steel 14301
Locking	Lock & Lift
Load class	L 15 (EN 1253-1)
Grating design	Kessel
Slip resistance class	R9 according to DIN 51130; C according to DIN 51097
Rim width	132 mm
Rim length	132 mm
Upper section	adjustable in three dimensions
Shape of upper section	square
Upper section material	ABS