Data sheet

Variofix upper section Slotted cover, 304 SST, anti-slip, L 15

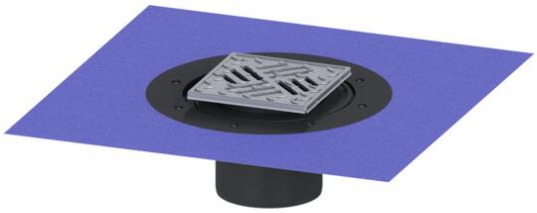



Article information

article number: 48907
EAN code: 4026092053690
Price group: 70

Product advantages

- Different covers selectable
- Including waterproofing membrane

Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

General features

Sustainable	through the use of recycled material

Version

System	125
Seal	Lip seal
Waterproofing layer on the upper section	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including)	W3-I

Dimensions

Vertical adjustment	10|18 mm
Net weight	1.57 kg
Gross weight	1.96 kg
Diameter	312 mm
Type of height adjustability	vertically adjustable upper section
Height	120 mm
Packaging dimension: length	390 mm
Packaging dimension: width	190 mm
Packaging dimension: height	310 mm

Coverage features

Type of cover	Slotted cover
Cover material	Stainless steel 14301
Colour of cover	silver
Min. flooring height	10 mm
Frame material	Stainless steel 14301
Locking	screwed
Load class	L 15 (EN 1253-1)
Grating design	Kessel
Slip resistance class	R11 according to DIN 51130; C according to DIN 51097
Rim width	150 mm
Rim length	150 mm
Max. flooring height	18 mm
Upper section	adjustable in three dimensions
Shape of upper section	square
Upper section material	ABS