Data sheet

Ferrofix floor drain press, fl. DN 70, vert., Waterpr layer, slot grat.

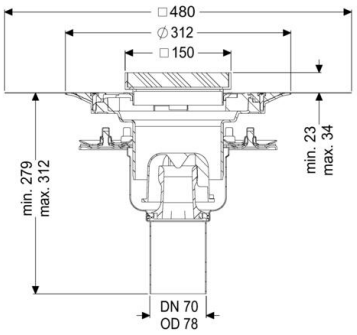

Article information

article number: 54210.21
EAN code: 4026092056424
Price group: 70

Product advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel
- High flow rate

Description

The Ferrofix stainless steel floor drain is used for point drainage and is equipped with a pressure sealing flange as well as a removable odour trap made of stainless steel, a lip seal and a temporary protective cover. The pressure sealing flange with bolts and screws made of stainless steel is used for the clamping or welding of bitumen and polymer bitumen sheets as well as for polymer and elastomer sealing sheets. Only membranes tested by the manufacturer may be used for watertight seals. The outlet socket is suitable for connection to SML cast iron pipes. With connection option for equipotential bonding.

General features

Standard	EN 1253-1
Nominal size (DN)	70
Outer diameter (OD)	78 mm
Approval	Z-19.53-2414,Z-19.53-2414_V,Z-19.17-1719,Z-19.17-1719_V
Odour trap	included

Version

System	125
Waterproofing layer on the upper section	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body	Press sealing flange (suitable for creating watertight seals)
Sealing water height	50 mm

Dimensions

Vertical adjustment	23|40 mm
Net weight	4.33 kg
Gross weight	5.32 kg
Type of height adjustability	vertically adjustable upper section
Length	273 mm
Width	273 mm
Packaging dimension: length	586 mm
Packaging dimension: width	386 mm
Packaging dimension: height	400 mm

Tank/drain body

Number of outlets	1
Material of drain body	Stainless steel 14301
Socket version	vertical

Coverage features

Type of cover	Slotted cover
Cover material	Stainless steel 14301
Width of cover	138 mm
Length of cover	138 mm
Locking	unlocked
Load class	L 15 (EN 1253-1)
Rim width	150 mm
Rim length	150 mm
Upper section	adjustable in three dimensions
Shape of upper section	square
Upper section material	ABS