


Data sheet

## Ferrofix upper section Sys 125, Gl fl., slot grat., 146x146 mm

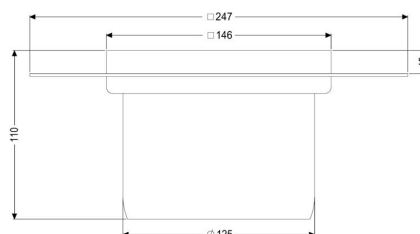

### Article information

article number: 54915  
 EAN code: 4026092072462  
 Price group: 70

### Product advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies

### Description

Used in combination with a drain body of the KESSEL modular system 125, the stainless steel upper section is suitable for indoor point drainage. The upper section is suitable for thin-layered floorings (e.g. epoxy resin) and has a circumferential adhesive joint edge (15 mm deep and 50 mm folded outwards).

### Version

System  
 Note on installation depth  
 Waterproofing layer on the upper section

125  
 For load class M 125, on-site shimming necessary  
 Adhesive flange (suitable for moisture barriers)

### Dimensions

Net weight	2.7 kg
Gross weight	2.86 kg
Length	246 mm
Width	246 mm
Height	110 mm
Packaging dimension: length	247 mm
Packaging dimension: width	247 mm
Packaging dimension: height	180 mm

### Coverage features

Type of cover	Slotted cover
Cover material	Stainless steel 14301
Height of cover	15 mm
Surface	pickled
Locking	unlocked
Load class	L 15 (EN 1253-1)
Rim width	146 mm
Rim length	146 mm
Max. flooring height	15 mm
Shape of upper section	square
Upper section material	Stainless steel 14301
Mesh size	23 x 23 mm