Data sheet

Ferrofix upper section Glued flange H:6mm, 300x300mm,grate,L 15

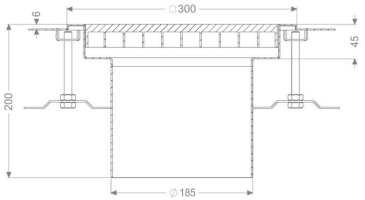

Article information
article number: 55133
EAN code: 4026092107584
Price group: 70

Product advantages
- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies

Description
Used in combination with a drain body of the KESSEL modular system 185, the stainless steel upper section is suitable for indoor point drainage. The upper section is suitable for thin-layered floorings (e.g. epoxy resin) and has a circumferential adhesive joint edge (6 mm deep and 50 mm folded outwards).

General features

Standard	EN 1253-1

Version

System	185
Waterproofing layer on the upper section	Adhesive flange (suitable for moisture barriers)

Dimensions

Net weight	0 kg
Gross weight	0 kg
Length	300 mm
Width	300 mm
Height	200 mm
Packaging dimension: length	0 mm
Packaging dimension: width	0 mm
Packaging dimension: height	0 mm

Coverage features

Type of cover	Slotted cover
Locking	unlocked
Load class	L 15 (EN 1253-1)
Grating material	304 stainless steel
Max. flooring height	6 mm
Shape of upper section	square
Upper section material	Stainless steel 14301

Cover

Grating material	304 stainless steel