Data sheet

Backwater valve Staufix SWA DN 200, Floor slab, tileable

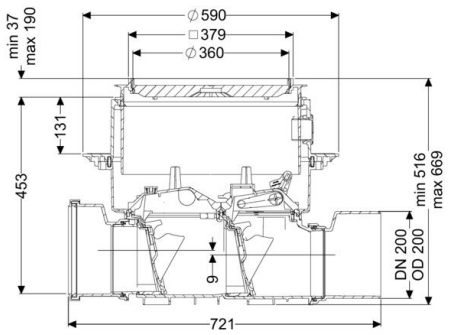

Article information

article number: 73200.10X
EAN code: 4026092073544
Price group: 30

Product advantages

- Simple conversion to Staufix FKA or Pumpfix F
- Fast, simple and toolless maintenance
- Available as a complete set or module set

Description

The premium backwater valve for wastewater without sewage is equipped with two mechanical flaps which close automatically in the event of backwater. One flap serves at the same time as an emergency closure to be closed by hand. Thanks to the modular KESSEL system, existing systems can easily be converted to a Staufix FKA premium backwater valve or a Pumpfix F backwater pumping station.

General features

Colour	black
Standard	EN 13564
Nominal size (DN)	200
Outer diameter (OD)	200 mm
Note on nominal size	Hydraulics correspond to DN 150
Type of wastewater	containing faecal matter (excepterion: Germany faecal-free)
Installation situation	floor slab installation
Delivery state	Installation-ready (connection parts must be connected on site)
Backwater protection	Type 2
Tightness	surface water resistant

Version

Emergency closure	yes
Mechanical backwater flaps	2

Dimensions

Net weight	14 kg
Gross weight	19.5 kg
Groundwater resistant from lower edge of base section	3000 mm
Cutout dimension, width	750 mm
Cutout dimension, length	750 mm
Vertical drop between inlet and outlet	9 mm
Installation depth	516|669 mm
Type of height adjustability	vertically adjustable upper section
Length	720 mm
Width	590 mm
Packaging dimension: length	720.5 mm
Packaging dimension: width	590 mm
Packaging dimension: height	348 mm

Tank/drain body

Socket version	including spigot and socket

Coverage features

Type of cover	tileable cover plate
Cover material	Polymer
Width of cover	366 mm
Length of cover	366 mm
Locking	Lock & Lift
Load class	K 3 (EN 1253-1)
Tightness	surface water resistant
Max. flooring height	16 mm