Data sheet

Controlfix clean out DN 125, Floor slab, tileable

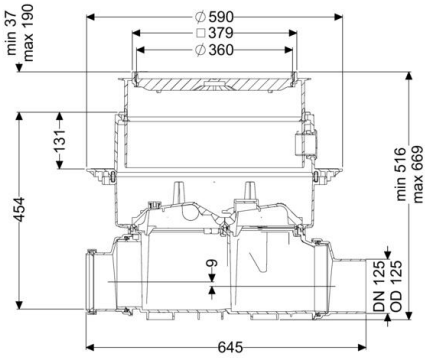

Article information

article number: 80125X
EAN code: 4026092004081
Price group: 30

Product advantages

- Simple conversion to Staufix SWA
- Fast, simple and toolless maintenance
- Quick and toolless access for cleaning

Description

The Premium clean out for faecal and faecal-free wastewater makes easy access to wastewater pipes possible for inspection and maintenance work. Thanks to the modular KESSEL system, existing systems can easily be converted to a Staufix SWA Premium backwater valve, Staufix FKA or Pumpfix F backwater pumping station.

General features

Colour	black
Nominal size (DN)	125
Outer diameter (OD)	125 mm
Type of wastewater	for wastewater with and without sewage
Installation situation	floor slab installation
Delivery state	Installation-ready (connection parts must be connected on site)
Tightness	surface water resistant

Dimensions

Net weight	14 kg
Gross weight	19.5 kg
Groundwater resistant from lower edge of base section	3000 mm
Cutout dimension, width	750 mm
Cutout dimension, length	750 mm
Vertical drop between inlet and outlet	9 mm
Installation depth	516|669 mm
Type of height adjustability	vertically adjustable upper section
Length	486 mm
Width	590 mm
Packaging dimension: length	645.5 mm
Packaging dimension: width	590 mm
Packaging dimension: height	348 mm

Tank/drain body

Socket version	including spigot and socket

Coverage features

Type of cover	tileable cover plate
Cover material	Polymer
Width of cover	366 mm
Length of cover	366 mm
Locking	Lock & Lift
Load class	K 3 (EN 1253-1)
Tightness	surface water resistant
Max. flooring height	16 mm