Data sheet

Grease separat. EasyClean Modular free, NS 2, round, Direct disposal

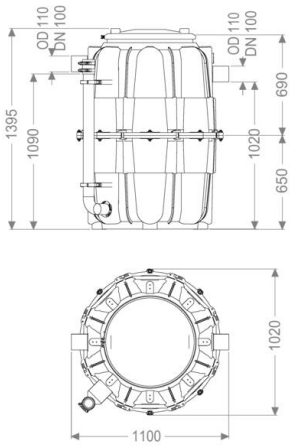

Article information

article number: 93002.00/D1-R
EAN code: 4026092111659
Price group: 60

Product advantages

- Ideal where access is tight
- can be divided into 3 parts for insertion, for an insertion opening of max. 66 cm
- Direct disposal with the tank closed

Description

The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms and comes without metallic components in the tank. Thanks to the modular design, the separator can be inserted even where access is extremely tight. The collecting tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap. A service access cover with odour-tight cover and quick-release closures makes easy access possible for cleaning and maintenance work. A direct disposal pipe socket is available for odour-reduced manual disposal. 20 year polyethylene warranty.

General features

Material	PE
Standard	EN 1825: 2004
Installation situation	free-standing installation
Delivery state	Installation-ready (connection parts must be connected on site)
Scope of delivery	Storz-B coupling R 2 1/2" for disposal vehicle connection
Tightness	odour-tight

Version

Chamber system	two-piece chamber
Disposal variant	Direct
Nominal size (NS)	2
Disposal system	Disposal connection
Type of disposal	manual

Dimensions

Net weight	57 kg
Gross weight	68 kg
Set-up area, height	1395 mm
Required access area, length	1100 mm
Required access area, width	1020 mm
Required access area, height	690 mm
Packaging dimension: length	1300 mm
Packaging dimension: width	1000 mm
Packaging dimension: height	1500 mm

Tank/drain body

Outlet nominal size (DN)	100
Inlet nominal size (DN)	100

Coverage features

Type of cover	Cover
Locking	Quick-release closure
Tightness	odour-tight

Separator contents	400 l
Total volume	600 l
Contents of sludge trap	200 l
Storage quantity of grease	80 l