Data sheet

Grease separator EasyClean ground NS 2, Direct, 800-1200 mm, A/B, right

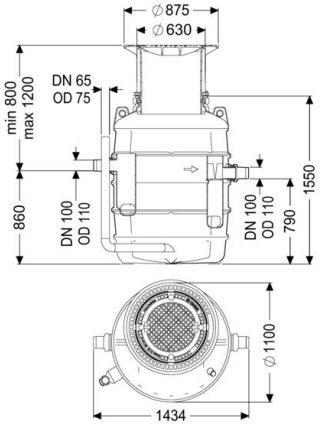

Article information

article number: 93002.120B-DR
EAN code: 4026092095102
Price group: 60

Product advantages

- Low odour and clean disposal
- Defined disposal point
- Complete emptying of the separator

Description

The separator for greasy wastewater is suitable for installation in the ground and comes without metallic components in the tank. The collecting tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap and has a rounded base for fast and clean disposal. Access for cleaning and maintenance work is possible via one or several service access covers. A direct disposal pipe socket is available for odour-reduced manual disposal. A load distribution slab must be installed on site for load class D. The reinforcement drawings are available from KESSEL. 20 year polyethylene warranty.

General features

Material	PE
Installation situation	underground installation
Delivery state	Installation-ready (connection parts must be connected on site)
Tightness	odour-tight and surface water resistant

Version

Note on installation depth	Installation in the ground, frost-free depth 1200 mm
Direction of flow	right
Disposal variant	Direct
Nominal size (NS)	2
Disposal system	Disposal pipe
Type of disposal	manual
Load-bearing capacity (DIN 19901)	E2

Dimensions

Net weight	120 kg
Gross weight	127 kg
Groundwater resistant from lower edge of base section	500 mm
Diameter	648 mm
Installation depth	800|1200 mm
Length	1380 mm
Width	1106 mm
Packaging dimension: length	900 mm
Packaging dimension: width	900 mm
Packaging dimension: height	2378 mm

Tank/drain body

Distance pipe bottom outlet to tank bottom	790 mm
Distance pipe bottom inlet to tank bottom	860 mm
Outlet nominal size (DN)	100
Inlet nominal size (DN)	100
Connection inlet/outlet sockets	PE-HD pipes in accordance with DIN 19537, PVC-KG pipes in accordance with DIN 19534, PP or AS
Clear width of entry (LW)	600 mm

Coverage features

Type of cover	Cover plate
Cover material	Grey iron
Colour of cover	black
Load class	B 125 (EN 124)
Tightness	odour-tight and surface water resistant

Separator contents	370 l
Contents of sludge trap	200 l
Storage quantity of grease	120 l
Storage quantity of light liquid	120 l