Data sheet

Grease separat. EasyClean Modular free, NS 3, Direct, 3-part, TS

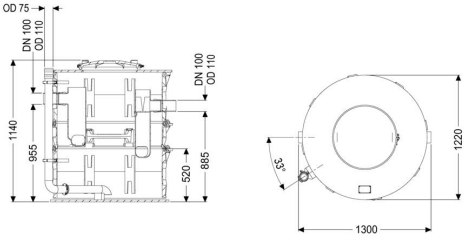

Article information

article number: 93003-D1-R2-TS
EAN code: 4026092104040
Price group: 60

Product advantages

- Ideal where access is tight
- can be divided into 3 parts for insertion, for an insertion opening of max. 66 cm
- Direct disposal with the tank closed

Description

The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms and comes without metallic components in the tank. Thanks to the modular design, the separator can be inserted even where access is extremely tight. The collecting tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap. A service access cover with odour-tight cover and quick-release closures makes easy access possible for cleaning and maintenance work. A direct disposal pipe socket is available for odour-reduced manual disposal. 20 year polyethylene warranty.

General features

Material	PE
Standard	EN 1825: 2004 DIN 4040-100
Installation situation	free-standing installation
Delivery state	Installation-ready (connection parts must be connected on site)
Tightness	odour-tight

Version

Chamber system	three-piece chamber
Disposal variant	Direct
Shredder-Mix-System	no
Inspection window	no
Nominal size (NS)	3
SonicControl	no
Disposal system	Disposal connection
Refill inlet in accordance with DIN 1988	no
Type of disposal	manual

Dimensions

Net weight	110 kg
Gross weight	128 kg
Height centre section	500 mm
Height tank bottom up to centre section	550 mm
Height centre section to top edge of tank	580 mm
Required access area, length	1240 mm
Required access area, width	1383 mm
Required access area, height	1300 mm
Packaging dimension: length	1300 mm
Packaging dimension: width	1240 mm
Packaging dimension: height	1383 mm

Tank/drain body

Distance pipe bottom outlet to tank bottom	885 mm
Distance pipe bottom inlet to tank bottom	955 mm
Outlet nominal size (OD)	110 mm
Outlet nominal size (DN)	100
Inlet nominal size (OD)	110 mm
Inlet nominal size (DN)	100
Connection inlet/outlet sockets	PE-HD pipes in accordance with DIN 19537, HT pipes in accordance with DIN 19560, PP or AS

Coverage features

Type of cover	Cover
Cover material	Polymer
Colour of cover	black
Locking	Quick-release closure
Tightness	odour-tight

Control

Control unit	no

Separator contents	420 l
Total volume	720 l
Contents of sludge trap	300 l
Storage quantity of grease	120 l