Data sheet

EasyClean round grease separator free, NS 20, Direct

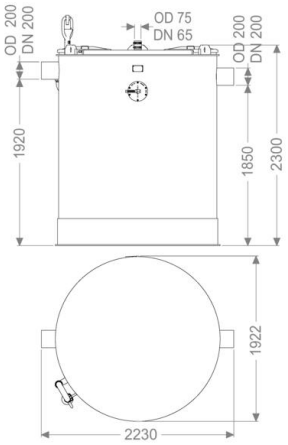

Article information

article number: 93020.05/D
EAN code
Price group: 60

Product advantages

- Odour-reduced disposal with the tank closed
- Low-maintenance operation

Description

The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms and is manufactured without the need for metallic internal structural components. The collection tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap and has sloped sides in the base to promote fast and efficient disposal. Two odour-tight covers with quick-release closures make easy access possible for cleaning and maintenance work. A direct disposal pipe socket is available for reduced-odour manual disposal. After disposal, a maximum of 3 litres residual sludge volume is left in the tank. 20 year polyethylene warranty.

General features

Scope of delivery	Storz-B coupling R 2 1/2" for disposal vehicle connection
Tightness	odour-tight

Version

Shut-off valve	yes
Disposal variant	Direct
Shredder-Mix-System	no
Inspection window	no
Nominal size (NS)	20
SonicControl	no
Disposal system	Disposal connection
Refill inlet in accordance with DIN 1988	no
Type of disposal	manual
Load-bearing capacity (DIN 19901)	F3

Dimensions

Net weight	280 kg
Gross weight	360 kg
Set-up area, length	2230 mm
Set-up area, width	1922 mm
Set-up area, height	2300 mm
Required access area, length	2230 mm
Required access area, width	1880 mm
Required access area, height	2300 mm
Packaging dimension: length	0 mm
Packaging dimension: width	0 mm
Packaging dimension: height	0 mm

Tank/drain body

Nominal pressure (PN)	10
Pressure pipe connection (DN)	65
Pressure pipe connection (OD)	75 mm
Distance pipe bottom outlet to tank bottom	1850 mm
Distance pipe bottom inlet to tank bottom	1920 mm
Outlet nominal size (OD)	200 mm
Outlet nominal size (DN)	200
Inlet nominal size (OD)	160 mm
Inlet nominal size (DN)	150
Connection inlet/outlet sockets	PE-HD pipes in accordance with DIN 19537, HT pipes in accordance with DIN 19560, PP or AS

Coverage features

Type of cover	Cover
Cover material	Polymer
Colour of cover	black
Locking	Quick-release closure
Tightness	odour-tight

Control

Control unit	no

Separator contents	2650 l
Total volume	4650 l
Contents of sludge trap	2000 l
Storage quantity of grease	800 l