Data sheet

Grease seperator EasyClean ground NS 3, Standard, 1040-1740 mm, Class A/B

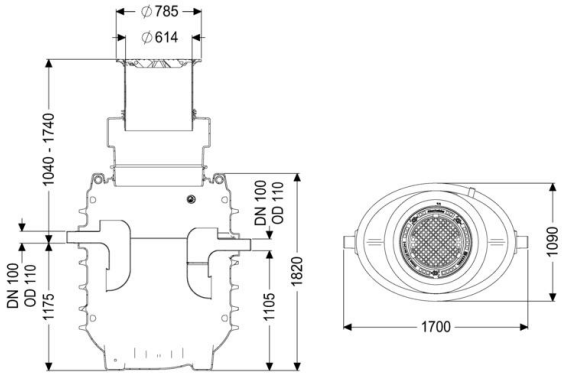

Article information

article number: 95030-170B
EAN code: 4026092100486
Price group: 60

Product advantages

- Vertically adjustable upper section with odour-tight cover plates in various load classes
- Resistant to groundwater
- Low-maintenance operation

Description

The separator for greasy wastewater is suitable for installation in the ground and comes without metallic structural components in the tank. The collecting tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap and has a rounded base for fast and clean disposal. Access for cleaning and maintenance work is possible via a service access cover.
Manual disposal is carried out with the tank open.
A load distribution slab must be installed on site for load class D. The reinforcement drawings are part of the EBA and are available from KESSEL.
The tank is groundwater resistant up to ground level (GL). 20 year polyethylene warranty.

General features

Material	PE
Installation situation	underground installation
Delivery state	Installation-ready (connection parts must be connected on site)
Tightness	odour-tight and surface water resistant

Version

Note on installation depth	Ground installation frost-free depth 1700 mm
Disposal variant	Standard
Shredder-Mix-System	no
Inspection window	no
Nominal size (NS)	3
SonicControl	no
Refill inlet in accordance with DIN 1988	no
Type of disposal	manual with suction hose
Load-bearing capacity (DIN 19901)	E4

Dimensions

Net weight	255 kg
Gross weight	255 kg
Installation depth	1040|1740 mm
Type of height adjustability	vertically adjustable upper section, can be tilted by 5 degrees
Length	1700 mm
Width	1090 mm
Height	1820 mm
Packaging dimension: length	1300 mm
Packaging dimension: width	2200 mm
Packaging dimension: height	1970 mm

Tank/drain body

Distance pipe bottom outlet to tank bottom	1105 mm
Distance pipe bottom inlet to tank bottom	1175 mm
Outlet nominal size (OD)	110 mm
Outlet nominal size (DN)	100
Inlet nominal size (OD)	110 mm
Inlet nominal size (DN)	100
Connection inlet/outlet sockets	PE-HD pipes in accordance with DIN 19537, PVC-KG pipes in accordance with DIN 19534, PP or AS
Clear width of entry (LW)	600 mm

Coverage features

Type of cover	Cover plate
Cover material	Grey iron
Colour of cover	black
Locking	Lock & Lift
Load class	B 125 (EN 124)
Tightness	odour-tight and surface water resistant

Control

Control unit	no

Separator contents	615 l
Max. grease layer thickness	125 mm
Total volume	915 l
Contents of sludge trap	300 l
Storage quantity of grease	120 l