Data sheet

Grease separator EasyClean ground NS 8,5, Direct, 665-1165 mm, A/B, left

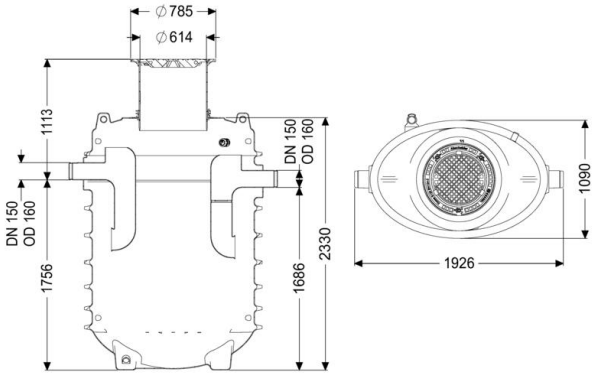

Article information

article number: 95085-120B-DL
EAN code: 4026092100998
Price group: 60

Product advantages

- Low odour and clean disposal
- Defined disposal point
- Complete emptying of the separator

Description

The separator for greasy wastewater is suitable for installation in the ground and comes without metallic structural components in the tank. The collecting tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap, and has a rounded base for fast and clean disposal. Access for cleaning and maintenance work is possible via a service access cover. A direct disposal pipe socket is available for manual disposal. A load distribution slab must be installed on site for load class D. The reinforcement drawings are part of the EBA and are available from KESSEL. The tank is groundwater resistant up to ground level (GL). 20 year polyethylene warranty.

General features

Material	PE
Installation situation	underground installation
Delivery state	Installation-ready (connection parts must be connected on site)
Tightness	odour-tight and surface water resistant

Version

Note on installation depth	Installation in the ground, frost-free depth 1200 mm
Direction of flow	left
Disposal variant	Direct
Nominal size (NS)	8.5
Disposal system	Disposal pipe
Type of disposal	manual
Load-bearing capacity (DIN 19901)	E4

Dimensions

Net weight	310 kg
Gross weight	315 kg
Diameter	648 mm
Installation depth	665|1165 mm
Length	1870 mm
Width	1150 mm
Height	2375 mm
Packaging dimension: length	3000 mm
Packaging dimension: width	2900 mm
Packaging dimension: height	1240 mm

Tank/drain body

Distance pipe bottom outlet to tank bottom	1685 mm
Distance pipe bottom inlet to tank bottom	1755 mm
Outlet nominal size (DN)	150
Inlet nominal size (OD)	160 mm
Inlet nominal size (DN)	150
Connection inlet/outlet sockets	PE-HD pipes in accordance with DIN 19537, PVC-KG pipes in accordance with DIN 19534, PP or AS
Clear width of entry (LW)	600 mm

Coverage features

Type of cover	Cover plate
Cover material	Grey iron
Colour of cover	black
Locking	Lock & Lift
Load class	B 125 (EN 124)
Tightness	odour-tight and surface water resistant

Separator contents	850 l
Max. grease layer thickness	325 mm
Total volume	1700 l
Contents of sludge trap	850 l
Storage quantity of grease	340 l