Data sheet

Grease separator EasyClean ground Multi, Standard, NS 4, T 120 mm, D 400

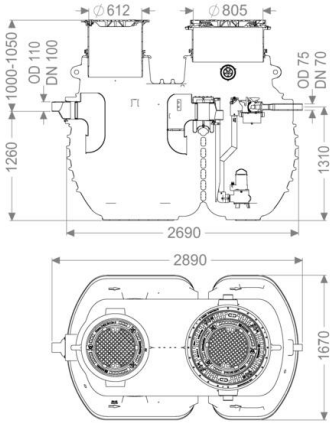

Article information

article number: 96004-G-120D
EAN code: 4026092109748
Price group: 60

Product advantages

- Vertically adjustable upper section with odour-tight cover plates in various load classes
- Waterproof, resistant to aggressive wastewater
- Low-maintenance operation

Description

The unit for an underground installation combines a separator for greasy wastewater incl. sludge trap, a sampling system and a pumping station.
The tank of all system parts is made of permanently resistant polymer (PE).
The individual system parts can be accessed for cleaning and maintenance work via two inspection covers. Manual disposal takes place with the tank open.

The pumping station is equipped with two submersible pumps and a backflow preventer. The pumps are actuated via a level sensor.

The station is controlled by a user-friendly control unit, which can be connected to the building control system or optionally alarm and collective fault messages can be sent.

A load distribution slab must be installed on site for load class D. The reinforcement drawings are available from KESSEL. 20-year polyethylene warranty.

General features

Installation situation	underground installation
Tightness	odour-tight and surface water resistant

Version

Chamber system	Cistern
Disposal variant	Standard
Nominal size (NS)	4
Type of disposal	manual with suction hose

Dimensions

Net weight	749 kg
Gross weight	774 kg
Groundwater resistant from lower edge of base section	1800 mm
Installation depth	1000|1050 mm
Required access area, length	2890 mm
Length	2690 mm
Width	1670 mm
Packaging dimension: length	4188 mm
Packaging dimension: width	2870 mm
Packaging dimension: height	1960 mm
Height of discharge connection	1310 mm

Tank/drain body

Pressure pipe connection (DN)	65
Pressure pipe connection (OD)	75 mm
Distance pipe bottom inlet to tank bottom	1260 mm
Inlet nominal size (OD)	110 mm
Inlet nominal size (DN)	100
Number of inlets	1
Clear width of entry (LW)	600 mm

Coverage features

Type of cover	Cover plate
Cover material	Grey iron
Colour of cover	black
Locking	Lock & Lift
Load class	D 400 (EN 124)
Tightness	odour-tight and surface water resistant

Pumping device

Pump	GTK 1300
Number of pumps	2
Weight, pump	27 kg
Connection type	Direct connection
Protection class	I
Insulation class	H
Cos phi - power factor	0.8
Protection class (pump)	IP 68 (20m)
Temperature monitoring	integrated
Max. temperature (permanent) of conveyed material	40 °C
Max. pumping capacity	57 m³/h
Max. pumping height	12.4 m
Speed	2900 U/min
Power P1	1.3 kW
Power P2	1 kW
Operating mode	S1
Type of pump connection cable	H07RN-F 7G 1.5 mm²
Impeller type	Single-vane impeller
Length of mains cable for pump	10 m
Rated current	2,5| A

Pumping capacity

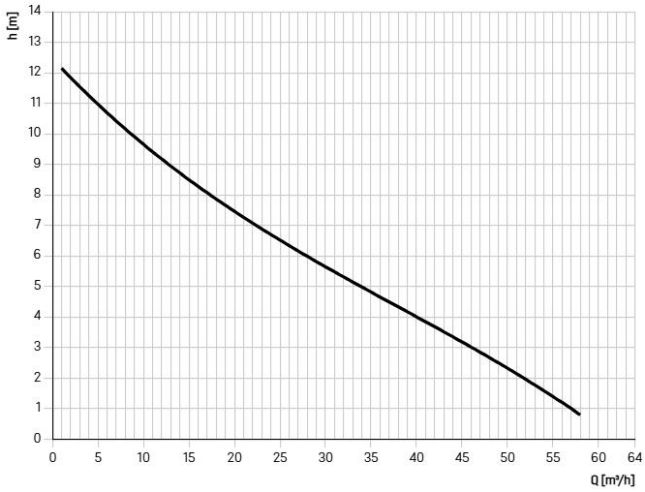

Control

Control unit	Connect Pro
Operating voltage	400 V
Mains frequency	50/60 Hz
Rated current (max.)	9|9 A
Output power (max.)	6.2 kW
Performance Active mode	3.0 W
Protection class control unit	IP 54
Motor protection	yes (electronically)
Type of fuse required (control unit)	C 16 A / C 20 A
Self-diagnosis system (SDS)	yes
Main switch	yes
Battery buffering	yes
Multi-line display	yes
Second Screen	yes (Wi-Fi)
Log book function	yes
Modbus (GLT or gateway)	yes (RTU)
Potential-free contact	yes (2)
Alarm sensor	Level sensor
Ext. audible alarm	yes
Level measurement instrument	Level sensor
Type of level measurement	hydrostatic
SonicControl Option	yes
Filling Option	yes
USB interface	no
Connection type	Direct connection
GSM interface	yes

Separator contents	1600 l
Max. grease layer thickness	80 mm
Total volume	2000 l
Contents of sludge trap	400 l
Storage quantity of grease	160 l