


Data sheet

## Lifting station Minilift L Underfloor, KTP 300, resistant, black

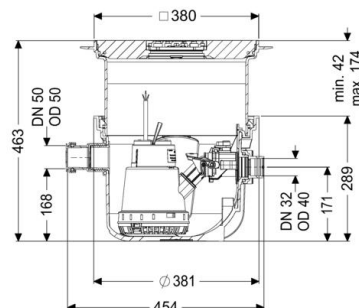

### Article information

article number: 280570SC  
 EAN code: 4026092093511  
 Price group: 20

### Product advantages

- Space-saving installation in the floor slab with integrated drainage function
- System ready to plug in
- Easy tool-free maintenance

### Description

The ready to plug in small lifting station for faecal-free wastewater is suitable for wastewater drainage of individual sanitary appliances. The submersible pump with float switch can be removed easily with the help of one-handed closures. The collection tank made of polymer (PE) has an open pump tank and is resistant to aggressive wastewater. The system for installation in the floor slab is preassembled for final installation on site.

### General features

Colour	grey
Standard	EN 12050-2
Type of wastewater	without sewage
Installation situation	floor slab installation
Delivery state	Installation-ready (connection parts must be connected on site)

### Version

Type of system	Single unit
Resistant	Resistant to waste water containing salt, softener and condensate
Pump control	Float switch
Backflow preventer	integrated

### Dimensions

Net weight	10.8 kg
Gross weight	11.8 kg
Installation depth	330 460 mm
Type of height adjustability	vertically adjustable upper section
Length	460 mm
Width	380 mm
Packaging dimension: length	460 mm
Packaging dimension: width	460 mm
Packaging dimension: height	500 mm

### Tank/drain body

Pressure pipe connection (DN)	32
Pressure pipe connection (OD)	40 mm
Inlet nominal size (DN)	50
Pumping volume	7 l
Tank volume	26.00 l

### Coverage features

Type of cover	Cover plate with slotted cover
Cover material	Polymer
Colour of cover	black
Width of cover	366 mm
Length of cover	366 mm
Locking	Lock & Lift
Load class	K 3 (EN 1253-1)

### Pumping device

Pump	KTP 300 resistant
Number of pumps	1
Weight, pump	4 kg
Connection type	Schuko (earthed contact) 2-pin
Protection class	I
Insulation class	F
Protection class (pump)	IP 68 (3m)
Temperature monitoring	integrated
Max. temperature (permanent) of conveyed material	40 °C
Hot water resistance for a short time (2 min)	80 °C
Max. pumping capacity	8 m³/h
Max. pumping height	6 m
Speed	2800 U/min
Power P1	0.34 kW
Power P2	0.21 kW
Operating mode	S1
Type of pump connection cable	H07RN-F 3G 1.5 mm²
Impeller type	Multi-vane impeller
Free passage	10 mm
Type of fuse required (pump)	C 16 A
Length of mains cable for pump	5 m
Rated current	1,6  A

### Control

Motor protection switch	yes
Level measurement instrument	Float switch
Type of level measurement	mechanical
Mains frequency	50 Hz
Operating voltage	230 V
Connection type	Schuko (earthed contact) 2-pin