Data sheet

Backwater valve Staufix DN 200, Floor slab, black, Type 2 R

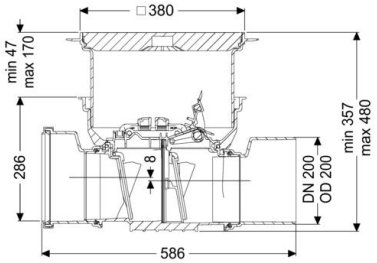

Article information

article number: 730200.10SR
EAN code: 4026092076552
Price group: 10

Product advantages

- Optional rat protection flap for additional safety
- Flexible installation, various covers available for floor slab installation
- Alternatively available as a module set

Description

The backwater valve for wastewater with and without sewage (ÖNORM Austria) is equipped with two mechanical flaps that close automatically in the event of backwater. One flap also serves as a manually lockable emergency closure. Thanks to the modular KESSEL system, existing systems can be easily converted to the StaufixControl backwater valve.

General features

Colour	black
Standard	EN 13564
Nominal size (DN)	200
Outer diameter (OD)	200 mm
Note on nominal size	Hydraulics correspond to DN 150
Type of wastewater	containing faecal matter (excepterion: Germany faecal-free)
Installation situation	floor slab installation
Delivery state	Installation-ready (connection parts must be connected on site)
Backwater protection	Type 2
Tightness	surface water resistant

Version

Stainless steel flap as rat protection	yes
Emergency closure	yes
Mechanical backwater flaps	2

Dimensions

Net weight	9 kg
Gross weight	11.6 kg
Groundwater resistant from lower edge of base section	3000 mm
Cutout dimension, width	750 mm
Cutout dimension, length	750 mm
Vertical drop between inlet and outlet	8 mm
Installation depth	341|464 mm
Type of height adjustability	vertically adjustable upper section
Length	586 mm
Width	444 mm
Packaging dimension: length	586 mm
Packaging dimension: width	486 mm
Packaging dimension: height	496 mm

Coverage features

Type of cover	Cover plate
Cover material	Polymer
Colour of cover	black
Width of cover	366 mm
Length of cover	366 mm
Locking	Lock & Lift
Load class	L 15 (EN 1253-1)
Tightness	surface water resistant