Data sheet

Controlfix backwater tech. mod. DN 150, two inlets flow direction

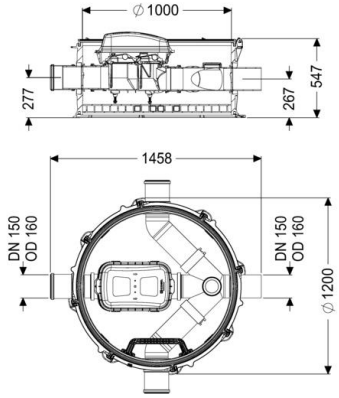

Article information

article number: 851502
EAN code: 4026092079409
Price group: 60

Product advantages

- Komfort: expensive living or useful space is not lost
- No system noises or unpleasant odours and soiling in the building
- Straightforward installation thanks to low weight of the combined engineering chamber modules and variable upper sections for adaptation to the ground level

Description

The backwater technical module is equipped with an integrated clean out Controlfix and access steps. Thanks to the modular KESSEL system, the clean out can easily be converted to a Staufix SWA Premium backwater valve, Staufix FKA or Pumpfix F backwater pumping station.

General features

Colour	black
Material	PE-HD
Type of wastewater	with sewage
Installation situation	underground installation
Delivery state	Installation-ready (connection parts must be connected on site)
Approval	Z-42.1-527

Version

Chamber system	modular chamber

Dimensions

Net weight	62 kg
Gross weight	82 kg
Groundwater resistant from lower edge of base section	3000 mm
Vertical drop between inlet and outlet	9 mm
Width	1200 mm
Height	520 mm
Packaging dimension: length	1300 mm
Packaging dimension: width	1300 mm
Packaging dimension: height	740 mm

Tank/drain body

Channel	continuous channel with inlets in the direction of flow right and left 90 degrees
Tank width max.	1390 mm
Distance from centre of outlet pipe to tank bottom	267 mm
Distance from centre of inlet pipe to tank bottom	277 mm
Number of outlets	1
Outlet nominal size (DN)	150
Inlet nominal size (DN)	150
Number of inlets	3
Clear width of tank (LW)	1000 mm