Data sheet

Box channel Ferrofix glued flange H: 15mm, 300x550mm

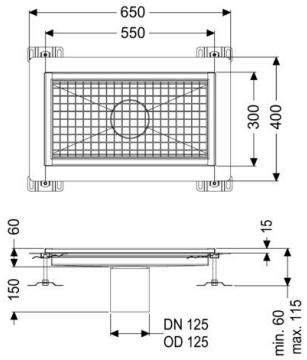

Article information

article number: 6030050
EAN code: 4026092066478
Price group: 80

Product advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Ferrofix box channel made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for joint sealing and has a circumferential adhesive edge (15 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is suitable for connecting waterproofing layers in accordance with DIN 18534, for all waterproofing classes.

General features

Nominal size (DN)	125
Outer diameter (OD)	125 mm
Glued flange height	15 mm

Version

Waterproofing layer on the upper section	Adhesive flange (suitable for moisture barriers)
Water exposure class in accordance to DIN 18534-1 (up to and including)	W3-I

Dimensions

Vertical adjustment	|
Net weight	9 kg
Gross weight	9 kg
Length	550 mm
Width	300 mm
Height	60 mm
Packaging dimension: length	547 mm
Packaging dimension: width	300 mm
Packaging dimension: height	58 mm

Coverage features

Type of cover	Slotted cover
Colour of cover	silver
Locking	placed
Load class	L 15 (EN 1253-1)
Slip resistance class	R12 according to DIN 51130; C according to DIN 51097
Upper section material	Stainless steel 14301