Data sheet

Slotted Channel Ferrofix glued flange H: 6mm, 17x1400mm, outer

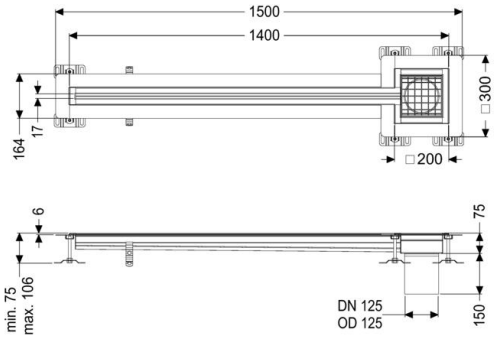

Article information

article number: 6202141
EAN code: 4026092099612
Price group: 80

Product advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Ferrofix slotted channel made of stainless steel with a material thickness of 1.5 mm (pickled in the immersion bath) is equipped with ground crosspieces, longitudinal and transverse gradients, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for thin-layered floorings (e.g. epoxy resin) and has an all-round adhesive rim (6 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is also suitable for connecting waterproofing.

General features

Material	Stainless steel 14301
Nominal size (DN)	125
Outer diameter (OD)	125 mm
Glued flange height	6 mm

Version

Waterproofing layer on the upper section	Adhesive flange (suitable for moisture barriers)
Position of sink trap	outside

Dimensions

Vertical adjustment	|
Net weight	9 kg
Gross weight	9 kg
Length	1400 mm
Width	17 mm
Height	75 mm
Packaging dimension: length	0 mm
Packaging dimension: width	0 mm
Packaging dimension: height	0 mm

Coverage features

Type of cover	Slotted cover
Colour of cover	silver
Width of cover	200 mm
Length of cover	200 mm
Locking	placed
Load class	L 15 (EN 1253-1)
Slip resistance class	R12 according to DIN 51130; C according to DIN 51097
Slot width	17 mm