Data sheet

Ferrofix slotted channel Tile conn.angle profile, 17x4000mm,outer

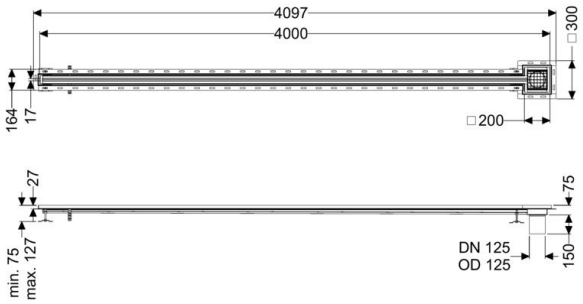

Article information

article number: 6302401
EAN code: 4026092099872
Price group: 80

Product advantages

- The channel profile is suitable for installation situations with high thermal loads
- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Ferrofix slotted channel made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for installation situations with high thermal loads. The tile connection angle profile protects against tile breakage at the edge.

General features

Material	Stainless steel 14301
Nominal size (DN)	125
Outer diameter (OD)	125 mm

Version

Waterproofing layer on the upper section	Tile connection angle
Position of sink trap	outside

Dimensions

Vertical adjustment	|
Net weight	30 kg
Gross weight	30 kg
Length	4000 mm
Width	17 mm
Height	75 mm
Packaging dimension: length	0 mm
Packaging dimension: width	0 mm
Packaging dimension: height	0 mm

Coverage features

Type of cover	Slotted cover
Colour of cover	silver
Width of cover	200 mm
Length of cover	200 mm
Locking	placed
Load class	L 15 (EN 1253-1)
Slip resistance class	R12 according to DIN 51130; C according to DIN 51097
Slot width	17 mm