Data sheet

Ferrofix floor tray tile connection angle profile, 500x500mm

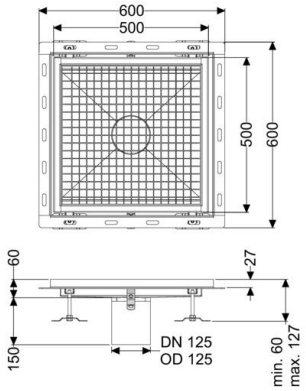

Article information

article number: 6350050
EAN code: 4026092099438
Price group: 80

Product advantages

- The channel profile is suitable for installation situations with high thermal loads
- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Ferrofix floor tray made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for installation situations with high thermal loads. The tile connection angle profile protects against tile breakage at the edge.

General features

Nominal size (DN)	125
Outer diameter (OD)	125 mm

Version

Waterproofing layer on the upper section	Tile connection angle

Dimensions

Vertical adjustment	|
Net weight	19 kg
Gross weight	19 kg
Length	500 mm
Width	500 mm
Height	60 mm
Packaging dimension: length	0 mm
Packaging dimension: width	0 mm
Packaging dimension: height	0 mm

Coverage features

Type of cover	Slotted cover
Colour of cover	silver
Locking	placed
Load class	L 15 (EN 1253-1)
Slip resistance class	R12 according to DIN 51130; C according to DIN 51097
Upper section material	Stainless steel 14301