Data sheet

Submers. pump Aquadive GTF 1700 without float switch, 10 m, 230 V

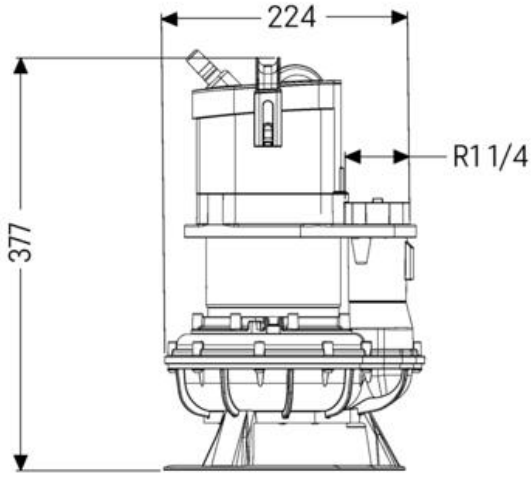

Article information
article number: 28782
EAN code: 4026092113479
Price group: 20

Product advantages

Description
Submersible pump Aquadive GTF1700, without float switch, 10m

The submersible pump for maximum operational safety, with longitudinally watertight moulded connection line and removable intake cage.

General features

Material	Polymer Stainless steel
Standard	EN 12050-2
Type of wastewater	without sewage
Cable length	10 m

Version

Pump control	without float switch
Pressure pipe connection	vertical

Dimensions

Net weight	14.1 kg
Gross weight	16.3 kg
Length	240 mm
Width	200 mm
Height	377 mm
Packaging dimension: length	547 mm
Packaging dimension: width	320 mm
Packaging dimension: height	355 mm

Tank/drain body

Pressure pipe connection	R 1 ¼ "

Pumping device

Pump	GTF 1700
Weight, pump	13.9 kg
Connection type	coded plug
Operating voltage	230 V
Protection class	I
Insulation class	F
Cos phi - power factor	0.97
Protection class (pump)	IP 68 (3m)
Temperature monitoring	integrated
Max. temperature (permanent) of conveyed material	40 °C
Hot water resistance for a short time (2 min)	80 °C
Max. pumping capacity	23 m^3/h
Max. pumping height	13 m
Speed	2850 U/min
Power P1	1.6 kW
Power P2	1 kW
Operating mode	S3 - 50 %
Type of pump connection cable	H07RN-F 3G 1.5 mm^2
Impeller type	Multi-vane impeller
Free passage	30 mm
Type of fuse required (pump)	C 16 A
Length of mains cable for pump	10 m
Rated current	7,3| A

Control

Operating voltage	230 V
Mains frequency	50 Hz
Connection type	coded plug