
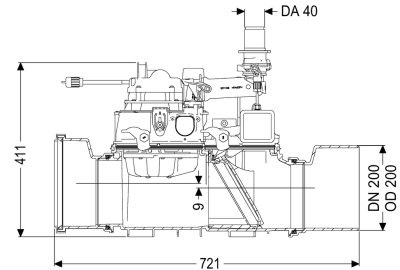


## Backwater lifting station Ecolift DN 200, exposed



### Article information

Item no.: 21200  
 GTIN: 4026092046791  
 Price group: 20

### Advantages

- Hybrid function: uses the natural fall to the sewer - pump is only used in case of backwater
- Quiet and energy-saving
- Double safety due to backwater flap and pressure loop

### Description

The backwater lifting station for faecal and non-faecal wastewater is equipped with one pump and one motor-driven closure system. The pipe cross-section is normally open and the water drains to the sewer via natural fall. Backwater is detected by an optical probe, which causes the motor-driven closure system to close automatically. During the backwater phase, the water drains via a pressure pipe, which carries the wastewater above the backwater level and into the sewer. Connection hole in the drain body for installation in the ground, incl. seal for pressure pipe and cable conduit. The station is controlled by a user-friendly control unit, which is optionally integrated in the building management system via a potential-free contact, or alarm and collective fault messages can be output via a GSM interface.

#### Variant

|                                     |                |
|-------------------------------------|----------------|
| Emergency closure:                  | yes            |
| Passage seal for conduit pipe (DN): | 50             |
| Pump control:                       | Control unit   |
| Protection class, probe:            | IP 68 (3m/48h) |
| Motor-driven backwater flaps:       | 1              |

#### General characteristics

|                      |        |
|----------------------|--------|
| Colour:              | black  |
| Nominal size (DN):   | 200    |
| Outer diameter (OD): | 200 mm |

|  |  |
|--|--|
| Note on nominal size:                                  | Hydraulics correspond to DN 150  |
| Type of wastewater:                                    | with sewage  |
| Installation situation:                                | exposed drainage pipe  |
| Delivery state:  | Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected) |
| Approval:  | Z-53.2-487   |
| Motor type:  | KSM 140  |
| Type de protection moteur:                             | IP 68 (3m/48h)   |
| Dimensions   |  |
| Net weight:  | 20 kg  |
| Gross weight:  | 25,5 kg  |
| Groundwater resistant from lower edge of base section: | 2000 mm  |
| Vertical drop between inlet and outlet:                | 9 mm   |
| Length:  | 720 mm   |
| Width:   | 243 mm   |
| Height:  | 405 mm   |
| Packaging dimension:                                   | length   |
| Packaging dimension:                                   | width  |
| Packaging dimension:                                   | height   |
| Tank/drain body  |  |
| Nominal pressure (PN):                                 | 6  |
| Pressure pipe connection (OD):                         | 40 mm  |
| Socket version:  | including spigot and socket  |
| Pumping device   |  |
| Pump:  | SPZ 1000   |
| Number of pumps:                                       | 1  |
| Weight, pump:  | 10 kg  |
| Connection type:                                       | coded plug   |
| Protection class:                                      | I  |
| Insulation class:                                      | F  |
| Cos phi - power factor:                                | 0,97   |
| Protection class (pump):                               | IP 68 (3m/48h)   |
| Temperature monitoring:                                | integrated   |
| Max. temperature (permanent) of conveyed material:     | 40 °C  |
| Max. pumping capacity:                                 | 11,5 m³/h  |
| Max. pumping height:                                   | 10 m   |
| Speed:   | 2800 U/min   |
| Power P1:  | 1,2 kW   |
| Power P2:  | 0,69 kW  |
| Operating mode:  | S3 - 50 %  |
| Type of fuse required (electrical protection):         | C 16 A   |
| Type of pump connection cable:                         | H07RN-F 3G 1.5 mm²   |
| Impeller type:   | Macerator  |
| Length of mains cable for pump:                        | 5 m  |

|  |               |
|--|---------------|
| Control  |               |
| Control unit:                                  | Comfort       |
| Standby power:                                 | 5 W           |
| Alarm sensor:                                  | optical probe |
| Level measurement instrument:                  | optical probe |
| Type of level measurement:                     | optical       |
| Protection class control unit:                 | IP 54         |
| Operating voltage:                             | 230 V         |
| Connection type:                               | coded plug    |
| Length of mains cable for control unit:        | 1,4 m         |
| Potential-free contact:                        | yes           |
| GSM interface:                                 | no            |
| USB interface:                                 | no            |
| Log book function:                             | yes           |
| Multi-line display:                            | yes           |
| Battery buffering:                             | yes           |
| Self-diagnosis system (SDS):                   | yes           |
| Type of fuse required (electrical protection): | C 16 A        |
| Rated current:                                 | 5,2 A         |