


Ferrofix cleanout Sys 100, adhesive, tileabl., odour-tight

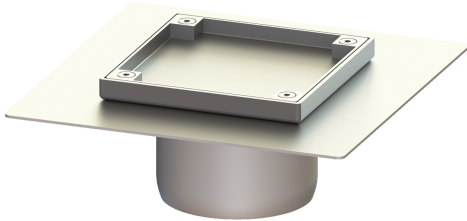

Article information

Item no.: 27177-PLF-KF
 GTIN: 4026092090848
 Price group: 70

Description

The Ferrofix cleanout made of 304 grade stainless steel serves as an upper section for direct connection on pipes. It is equipped with a closed, screwed cover plate.

| | |
|---|--|
| Variant | |
| System: | 100 |
| Waterproofing layer on the upper section: | Adhesive flange (suitable for moisture barriers) |

| | |
|----------------------|---------|
| Dimensions | |
| Net weight: | 1,62 kg |
| Gross weight: | 1,78 kg |
| Length: | 246 mm |
| Width: | 246 mm |
| Height: | 100 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

| | |
|-------------------------|---------------------------|
| Coverage features | |
| Type of cover: | tileable cover plate |
| Cover material: | Stainless steel 14301 |
| Width of cover: | 146 mm |
| Height of cover: | 15 mm |
| Length of cover: | 146 mm |
| Locking: | screwed |
| Load class: | L 15 (EN 1253-1) |
| Tightness: | odour-tight and gas-tight |
| Max. flooring height: | 15 mm |
| Upper section material: | Stainless steel 14301 |