


Comfort control unit 400V, Aqualift Mono, 4.0-6.3 A

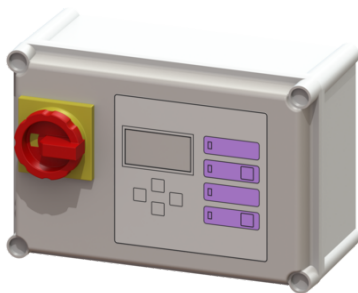

Article information

Item no.: 28756
 GTIN: 4026092055014
 Price group: 20

Advantages

- Self-diagnosis system (SDS)
- Potential-free contact for faults/warnings
- Reminder for when maintenance is due

Description

Comfort control unit suitable for 400V single stations. User-friendly menu navigation in multi-line display. With self-diagnosis system (SDS) and reminder when maintenance is due. Display of the current measured values. Easy setting of the function-relevant parameters, operating hours counter. Optional forwarding of alarm and collective fault messages via GSM interface.

Variant	
Series:	ab 03/2010
Type of system:	Single unit

General characteristics	
Colour:	grey
System type:	Mono
Servicepartner buyable:	No

Dimensions	
Net weight:	2,47 kg
Gross weight:	3,19 kg
Packaging dimension:	width
Packaging dimension:	height
Packaging dimension:	length

Pumping device	
Rated current:	4 - 6,3 A

Control	
Motor protection switch:	yes
Protection class probe:	IP 54
Potential-free contact:	yes
GSM interface:	yes
USB interface:	no

Log book function:	yes
Multi-line display:	yes
Battery buffering:	yes
Self-diagnosis system (SDS):	yes
Control unit:	Comfort
Rated current:	4 - 6,3 A