
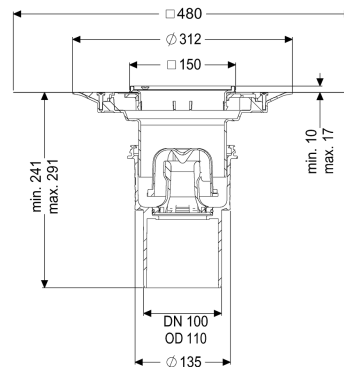


## Ecoguss project drain DN 100, vert., Variofix, Slotted cover

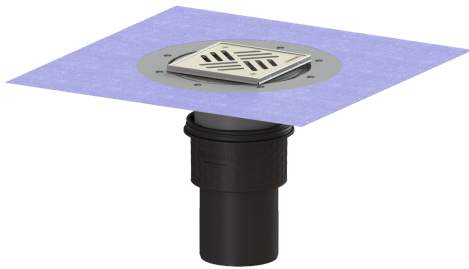

### Article information

Item no.: 48411.51  
GTIN: 4026092034330  
Price group: 40

### Advantages

- High-tech Ecoguss composite material
- Highest fire protection standards
- Scientifically confirmed sound protection effect

### Description

The Ecoguss project drain with connection flange is used for point drainage and is equipped with a removable odour trap as well as a lip seal and a temporary protective cover. The recyclable composite material Ecoguss meets the highest noise protection requirements, is temperature-resistant, resistant to aggressive media, and has a permanently corrosion-free surface. It is also briefly flammable from 100 to 400 degrees Celsius. The outlet socket is suitable for connection to SML cast iron pipes. Separate equipotential bonding is not necessary.

Variant

System:

Waterproofing layer on the upper section:

Waterproofing layer on the drain body:

Sealing water height:

125

Enclosed sealing collar to be glued (bd) according to DIN 18534

Connection flange

50 mm

General characteristics

Standard:

Nominal size (DN):

Outer diameter (OD):

Approval:

EN 1253-1

100

110 mm

Z-19.53-2414,Z-19.53-2414\_V,Z-19.17-1719,Z-19.17-1719\_V

Odour trap:

included

Dimensions

Net weight:

3,14 kg

|                               |                                     |
|-------------------------------|-------------------------------------|
| Gross weight:                 | 3,9 kg                              |
| Diameter:                     | 135 mm                              |
| Type of height adjustability: | vertically adjustable upper section |
| Length:                       | 135 mm                              |
| Width:                        | 135 mm                              |
| Packaging dimension:          | length                              |
| Packaging dimension:          | width                               |
| Packaging dimension:          | height                              |

|                         |                   |
|-------------------------|-------------------|
| Tank/drain body         |                   |
| Number of outlets:      | 1                 |
| Material of drain body: | Ecoguss resistant |
| Socket version:         | vertical          |

|                         |                                |
|-------------------------|--------------------------------|
| Coverage features       |                                |
| Type of cover:          | Slotted cover                  |
| Cover material:         | Stainless steel 14301          |
| Colour of cover:        | silver                         |
| Width of cover:         | 138 mm                         |
| Length of cover:        | 138 mm                         |
| Min. flooring height:   | 10 mm                          |
| Frame material:         | Stainless steel 14301          |
| Locking:                | screwed                        |
| Load class:             | K 3 (EN 1253-1)                |
| Rim width:              | 150 mm                         |
| Rim length:             | 150 mm                         |
| Max. flooring height:   | 17 mm                          |
| Upper section:          | adjustable in three dimensions |
| Upper section material: | ABS                            |