
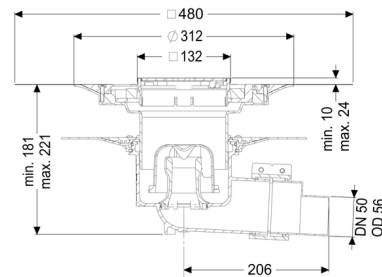
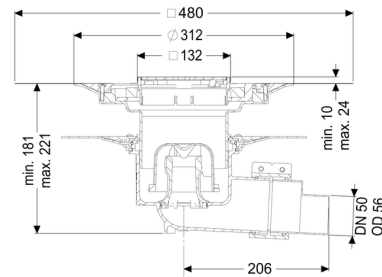


## Ecoguss project drain glu. flange DN 50, horiz., Variofix, Design cover

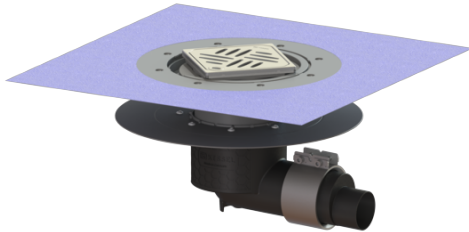

### Article information

Item no.: 48558.53  
 GTIN: 4026092054253  
 Discount group: 01

### Advantages

- High-tech Ecoguss composite material
- Ecoguss, highest fire protection standards
- Scientifically confirmed sound protection effect

### Description

The Ecoguss project drain is used for point drainage and is equipped with a glued flange as well as a removable odour trap, a lip seal and a temporary protective cover.

The recyclable composite material Ecoguss meets the highest noise protection requirements, is temperature-resistant, resistant to aggressive media, and has a permanently corrosion-free surface. It is also briefly flammable from 100 to 400 degrees Celsius.

The loose flange is used for clamping polymer and elastomer sealing sheets as well as for cold bitumen seals. The outlet socket is suitable for connection to SML cast iron pipes. Separate equipotential bonding is not necessary.

**Version:**

System:	125
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Adhesive flange (suitable for moisture barriers)
Water exposure class in accordance to DIN 18534-1 (up to and including):	W3-I
Sealing water height:	50 mm

**General characteristics:**

Nominal size (DN):	50
Outer diameter (OD):	58
Standard:	EN 1253-1

**Dimensions:**

Length:	348 mm
Width:	348 mm

**Tank:**

Number of outlets:	1 ST
--------------------	------

**Drain body:**

Material of drain body:	Ecoguss
Socket version:	lateral
Vertical adjustment:	vertically adjustable upper section
Upper section:	adjustable in three dimensions

**Coverage features:**

Type of cover:	Design cover
Grating design:	Kessel
Cover material:	304 stainless steel
Colour of cover:	silver
Min. flooring height:	10 mm
Max. flooring height:	24 mm
Load class:	L 15 (EN 1253-1)

Length: 120 mm  
Width: 120 mm  
Locking: Lock & Lift

**Grating:**

Rim length: 132 mm  
Rim width: 132 mm  
Rim material: 304 stainless steel

Upper section material: ABS