



Variofix upper section Kessel des cov, 304 SST, Lock&Lift, L15

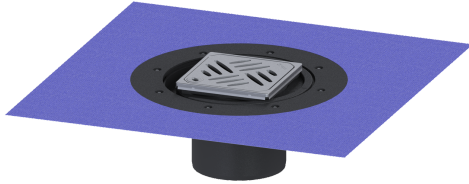

Article information

Item no.: 48904
GTIN: 4026092028841
Price group: 10

Advantages

- Different covers selectable
- Including waterproofing membrane

Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

Variant	
System:	125
Seal:	Lip seal
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including):	W3-I
General characteristics	
Sustainable:	through the use of recycled material
Dimensions	
Vertical adjustment:	10 - 23 mm
Net weight:	1,55 kg
Gross weight:	1,77 kg
Diameter:	312 mm
Type of height adjustability:	vertically adjustable upper section
Height:	120 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

Coverage features

Type of cover:

Cover material:

Colour of cover:

Frame material:

Locking:

Load class:

Grating design:

Slip resistance class:

Rim width:

Rim length:

Upper section:

Shape of upper section:

Upper section material:

Design cover

Stainless steel 14301

silver

Stainless steel 14301

Lock & Lift

L 15 (EN 1253-1)

Kessel

R9 according to DIN 51130; C according to DIN 51097

132 mm

132 mm

adjustable in three dimensions

square

ABS