


## Ferrofix upper section Sys 125, Slotted grating, 200 x 200 mm

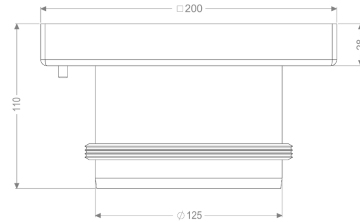

### Article information

Item no.: 54916  
GTIN: 4026092072455  
Price group: 70

### Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies

### Description

Used in combination with a drain body of the KESSEL modular system 125, the stainless steel upper section is suitable for indoor point drainage.

Variant	
System:	125
Note on installation depth:	For load class M 125, on-site shimming necessary
Waterproofing layer on the upper section:	Connection flange

General characteristics	
Standard:	EN 1253-1

Dimensions	
Net weight:	1,92 kg
Gross weight:	2,02 kg
Height:	100 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

Coverage features	
Type of cover:	Slotted cover
Cover material:	Stainless steel 14301
Height of cover:	28 mm
Min. flooring height:	28 mm

Surface:	pickled
Locking:	unlocked
Load class:	L 15 / M 125 (EN 1253-1)
Rim width:	200 mm
Rim length:	200 mm
Max. flooring height:	67 mm
Shape of upper section:	square
Upper section material:	Stainless steel 14301
Mesh size:	23 x 23 mm