


Ferrofix floor drain press, fl. Sys 200, horiz, Waterpr layer, Slot grt

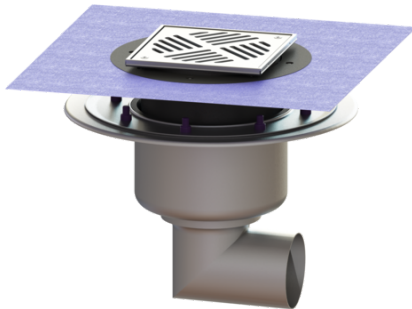

Article information

Item no.: 55550.52
GTIN: 4026092010082
Price group: 70

Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel

Description

The Ferrofix System 200 floor drain made of stainless steel is used for point drainage and is equipped with a pressure sealing flange as well as a removable odour trap made of stainless steel, a lip seal and a temporary protective cover. The pressure sealing flange with bolts and screws made of stainless steel is used for the clamping or welding of bitumen and polymer bitumen sheets as well as for polymer and elastomer sealing sheets. The outlet socket is suitable for connection to SML cast iron pipes. With connection option for equipotential bonding.

| | |
|---|---|
| Variant | |
| System: | 200 |
| Waterproofing layer on the upper section: | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Waterproofing layer on the drain body: | Press sealing flange (suitable for creating watertight seals) |
| Sealing water height: | 70 mm |
| General characteristics | |
| Standard: | EN 1253-1 |
| Nominal size (DN): | 100 |
| Outer diameter (OD): | 110 mm |
| Dimensions | |
| Vertical adjustment: | 12 - 25 mm |
| Net weight: | 9,56 kg |
| Gross weight: | 11,45 kg |
| Vertical adjustment: | vertically adjustable upper section |
| Width: | 420 mm |
| Length: | 420 mm |
| Packaging dimension: | width |
| Packaging dimension: | height |
| Packaging dimension: | length |

| | |
|-------------------------|--|
| Tank/drain body | |
| Number of outlets: | 1 |
| Material of drain body: | Stainless steel 14301 |
| System: | lateral |
| Coverage features | |
| Type of cover: | Slotted cover |
| Cover material: | Stainless steel 14301 |
| Width of cover: | 200 mm |
| Length of cover: | 200 mm |
| Surface: | Polished SST |
| Cover locking: | screwed |
| Load class: | L 15 (EN 1253-1) |
| Slip resistance class: | R11 according to DIN 51130; C according to DIN 51097 |
| Rim length: | 200 mm |
| Rim material: | 200 mm |
| Upper section: | adjustable in three dimensions |
| Shape of upper section: | square |
| Upper section material: | ABS |
| Odour trap: | included |