


Ferrofix floor drain press, fl. Sys200, vert., Waterpr layer, Slot grt

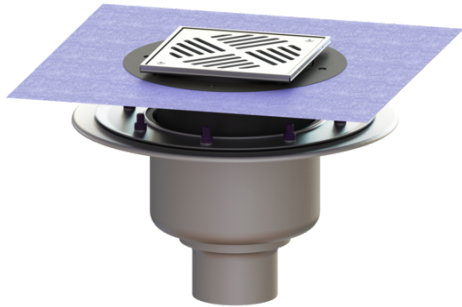

Article information

Item no.: 55600.52
GTIN: 4026092010129
Price group: 70

Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel

Description

The Ferrofix System 200 floor drain made of stainless steel is used for point drainage and is equipped with a pressure sealing flange as well as a removable odour trap made of stainless steel, a lip seal and a temporary protective cover. The pressure sealing flange with bolts and screws made of stainless steel is used for the clamping or welding of bitumen and polymer bitumen sheets as well as for polymer and elastomer sealing sheets. The outlet socket is suitable for connection to SML cast iron pipes. With connection option for equipotential bonding.

Variant	
System:	200
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Press sealing flange (suitable for creating watertight seals)
Sealing water height:	70 mm
General characteristics	
Standard:	EN 1253-1
Nominal size (DN):	100
Outer diameter (OD):	110 mm
Dimensions	
Vertical adjustment:	12 - 25 mm
Net weight:	8,52 kg
Gross weight:	10,4 kg
Vertical adjustment:	vertically adjustable upper section
Width:	420 mm
Length:	420 mm
Packaging dimension:	width
Packaging dimension:	height
Packaging dimension:	length

Tank/drain body	
Number of outlets:	1
Material of drain body:	Stainless steel 14301
System:	vertical
Coverage features	
Type of cover:	Slotted cover
Cover material:	Stainless steel 14301
Width of cover:	200 mm
Length of cover:	200 mm
Cover locking:	screwed
Load class:	L 15 (EN 1253-1)
Slip resistance class:	R11 according to DIN 51130; C according to DIN 51097
Rim length:	200 mm
Rim material:	200 mm
Upper section:	adjustable in three dimensions
Upper section material:	ABS
Odour trap:	included