



## Ferrofix upper section Sys 125, glue fl, Hole pat cover, K3

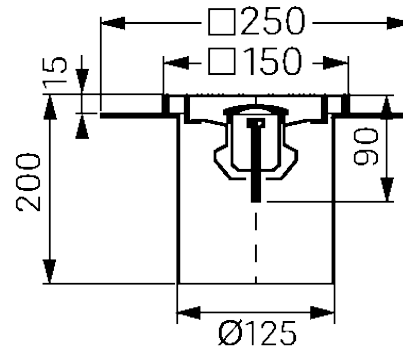

### Article information

Item no.: 59010  
GTIN: 4026092103456  
Price group: 70

### Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies

### Description

Used in combination with a drain body of the KESSEL modular system 125, the stainless steel upper section is suitable for indoor point drainage. The upper section is suitable for thin-layered floorings (e.g. epoxy resin) and has a circumferential adhesive joint edge (15 mm deep and 50 mm folded outwards).

Variant

System:	125
Waterproofing layer on the upper section:	Adhesive flange (suitable for moisture barriers)
General characteristics	
Odour trap:	"Easy Open"
Dimensions	
Net weight:	3 kg
Gross weight:	3,1 kg
Length:	246 mm
Width:	246 mm
Height:	150 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Coverage features	
Type of cover:	Hole pattern cover
Cover material:	Stainless steel 14301
Height of cover:	15 mm
Surface:	pickled
Locking:	screwed
Load class:	K 3 (EN 1253-1)
Rim width:	148 mm
Rim length:	148 mm
Max. flooring height:	15 mm
Shape of upper section:	square
Upper section material:	Stainless steel 14301