


## Ferrofix renovation drain GI fl., DN 50, horizontal, slot grat.

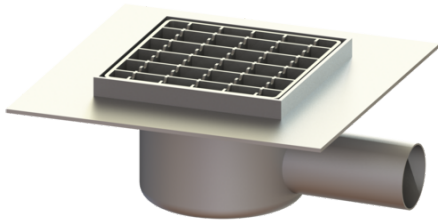

### Article information

Item no.: 59315  
GTIN: 4026092103029  
Price group: 70

### Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel
- ideal for the food industry
- catering kitchens and swimming pools

### Description

The Ferrofix stainless steel renovation drain is equipped with a horizontal outlet DN 50 as well as a removable odour trap.

#### Variant

System:	125
Waterproofing layer on the upper section:	Adhesive flange (suitable for moisture barriers)
Sealing water height:	50 mm
Discharge rate (l/s) with 20 mm backwater:	0,8

#### General characteristics

Nominal size (DN):	50
Outer diameter (OD):	50 mm

#### Dimensions

Net weight:	4 kg
Gross weight:	4,3 kg
Max. design height:	107 mm
Width:	248 mm
Height:	107 mm
Length:	273 mm
Packaging dimension:	width
Packaging dimension:	height
Packaging dimension:	length

#### Tank/drain body

Number of outlets:	1
Material of drain body:	Stainless steel 14301
System:	lateral

#### Coverage features

Type of cover:	Slotted cover
Cover material:	Stainless steel 14301
Width of cover:	138 mm
Length of cover:	138 mm
Cover locking:	unlocked
Load class:	L 15 (EN 1253-1)
Rim length:	148 mm
Rim material:	148 mm
Upper section material:	Stainless steel 14301
Odour trap:	included