


Box channel Ferrofix glued flange H: 15mm, 156 x 2014 mm

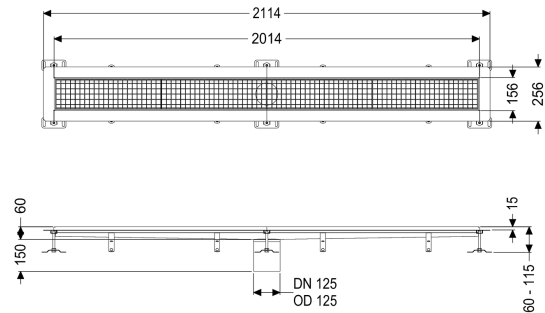

Article information

Item no.: 6015200
 GTIN: 4026092054666
 Price group: 80

Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

Description

The Ferrofix box channel made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for joint sealing and has a circumferential adhesive edge (15 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is suitable for connecting waterproofing layers in accordance with DIN 18534, for all waterproofing classes.

Variant

Waterproofing layer on the upper section:
 Water exposure class in accordance to DIN 18534-1 (up to and including):

Adhesive flange (suitable for moisture barriers)
 W3-I

General characteristics

| | |
|----------------------|--------|
| Nominal size (DN): | 125 |
| Outer diameter (OD): | 125 mm |
| Glued flange height: | 15 mm |

Dimensions

| | |
|----------------------|---------|
| Net weight: | 12 kg |
| Gross weight: | 12 kg |
| Length: | 2014 mm |
| Width: | 156 mm |
| Height: | 60 mm |
| Packaging dimension: | length |

Packaging dimension:
Packaging dimension:

width
height

Coverage features

Type of cover:

Slotted cover

Colour of cover:

silver

Locking:

placed

Load class:

L 15 (EN 1253-1)

Slip resistance class:

R12 according to DIN 51130; C according to DIN
51097

Upper section material:

Stainless steel 14301