


## Floor Tray Ferrofix glued flange H: 15mm, 600x600mm

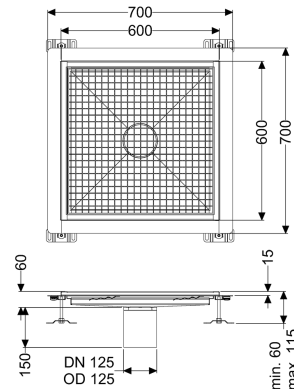

### Article information

Item no.: 6060600  
 GTIN: 4026092099308  
 Price group: 80

### Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

### Description

The Ferrofix floor tray made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for joint sealing and has a circumferential adhesive edge (15 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is suitable for connecting waterproofing layers in accordance with DIN 18534, for all waterproofing classes.

#### Variant

Waterproofing layer on the upper section:  
 Water exposure class in accordance to DIN 18534-1 (up to and including):

Adhesive flange (suitable for moisture barriers)  
 W3-I

#### General characteristics

|                      |        |
|----------------------|--------|
| Nominal size (DN):   | 125    |
| Outer diameter (OD): | 125 mm |
| Glued flange height: | 15 mm  |

#### Dimensions

|                      |         |
|----------------------|---------|
| Net weight:          | 19,4 kg |
| Gross weight:        | 19,4 kg |
| Length:              | 600 mm  |
| Width:               | 600 mm  |
| Height:              | 60 mm   |
| Packaging dimension: | length  |

Packaging dimension:  
Packaging dimension:

width  
height

Coverage features

Type of cover:

Slotted cover

Colour of cover:

silver

Locking:

placed

Load class:

L 15 (EN 1253-1)

Slip resistance class:

R12 according to DIN 51130; C according to DIN  
51097

Upper section material:

Stainless steel 14301