


## Slotted Channel Ferrofix without glued flange, 17x4000mm, middle

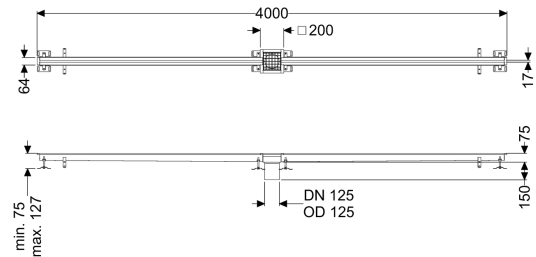

### Article information

Item no.: 6102400  
 GTIN: 4026092099766  
 Price group: 80

### Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

### Description

The Slotted Channel Ferrofix made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles.

#### Variant

|                                           |                   |
|-------------------------------------------|-------------------|
| Waterproofing layer on the upper section: | Connection flange |
| Position of sink trap:                    | central           |

#### General characteristics

|                      |                       |
|----------------------|-----------------------|
| Material:            | Stainless steel 14301 |
| Nominal size (DN):   | 125                   |
| Outer diameter (OD): | 125 mm                |

#### Dimensions

|         |         |
|---------|---------|
| Length: | 4000 mm |
| Width:  | 17 mm   |
| Height: | 75 mm   |

#### Coverage features

|                  |               |
|------------------|---------------|
| Type of cover:   | Slotted cover |
| Colour of cover: | silver        |
| Width of cover:  | 200 mm        |
| Length of cover: | 200 mm        |
| Locking:         | placed        |

|                        |                                                      |
|------------------------|------------------------------------------------------|
| Load class:            | L 15 (EN 1253-1)                                     |
| Slip resistance class: | R12 according to DIN 51130; C according to DIN 51097 |
| Slot width:            | 17 mm                                                |