


## Replacement pump SPF 400 KE 4.0 kW

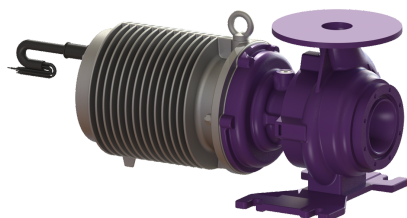

### Article information

Item no.: 680331  
 GTIN: 4026092067895  
 Price group: 90

### Description

Homogeniser pump for grease separators

Variant

Pump control:

Control unit

Dimensions

Net weight:

42,4 kg

Gross weight:

42,4 kg

Packaging dimension:

length

Packaging dimension:

width

Packaging dimension:

height

Pumping device

Pump:

SPF 400 KE

Weight, pump:

42,4 kg

Connection type:

Direct connection

Operating voltage:

400 V

Mains frequency:

50 Hz

Protection class:

I

Insulation class:

F

Protection class (pump):

IP 68 (3m/48h)

Temperature monitoring:

integrated

Max. temperature (permanent) of conveyed material:

35 °C

Max. pumping height:

16 m

Speed:

2900 U/min

Power P1:

4,2 kW

Power P2:

3,5 kW

Operating mode:

S2 - 50 min.

Type of pump connection cable:

H07RN-F 7G 1.5 mm<sup>2</sup>

Impeller type:

Radial impeller with macerating system

Length of mains cable for pump:

5 m

Rated current:

7,9 A

Control

Connection type:

Type of fuse required (electrical protection):

Direct connection

Fuse protection through control unit 400 V