


Backwater valve Staufix Basic DN 125, Type 1 R, with emergency closure

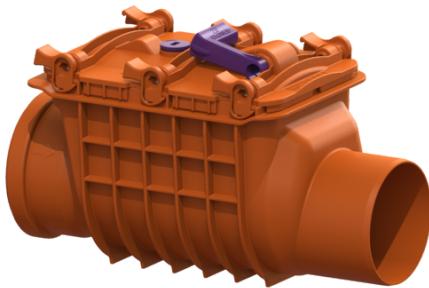

Article information

Item no.: 72125R
GTIN: 4026092028377
Price group: 10

Advantages

- Optional rat protection flap for additional safety
- Fast and toolless maintenance and cleaning
- Ideal for modernisation, can also be installed in existing pipes later

Description

The backwater valve for wastewater without sewage is equipped with one mechanical flap which closes automatically in the event of backwater and also serves as an emergency closure to be closed by hand. Thanks to the modular KESSEL system, existing systems can easily be supplemented by a second backwater flap.

Variant

Stainless steel flap as rat protection:	yes
Emergency closure:	yes
Mechanical backwater flaps:	1

General characteristics

Colour:	black
Standard:	EN 13564
Nominal size (DN):	125
Outer diameter (OD):	125 mm
Type of wastewater:	without sewage
Installation situation:	exposed drainage pipe
Delivery state:	installation-ready
Backwater protection:	Type 1

Dimensions

Net weight:	2,1 kg
Gross weight:	2,1 kg
Vertical drop between inlet and outlet:	9 mm
Width:	200 mm
Height:	280 mm
Length:	405 mm
Packaging dimension:	width

Packaging dimension:
Packaging dimension:

height
length

Coverage features
Adjustment range:

Quick-release closure