


## Grease separator EasyClean ground Multi, NS 7, Direct, 550-960 mm, B, rh

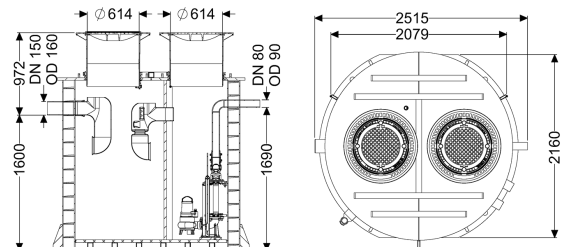

### Article information

Item no.: 96007.80B-DR  
 GTIN: 4026092098356  
 Price group: 60

### Advantages

- Low odour and clean disposal
- Defined disposal point
- Complete emptying of the separator

### Description

The unit for an underground installation combines a separator for greasy wastewater incl. sludge trap, a sampling system and a pumping station. The tank of all system parts is made of permanently resistant polymer (PE). The individual system parts can be accessed for cleaning and maintenance work via two service access covers. A direct disposal pipe socket is available for reduced odour during manual disposal. The pumping station is equipped with two submersible pumps and a backflow preventer. The submersible pumps are placed in the tank using guide rods. The pumps are actuated via a level sensor. The station is controlled by a user-friendly control unit, which can be connected to the building control system via a potential-free contact. Alternatively, alarm and collective fault messages can be sent by way of a GSM interface. A load distribution slab must be installed on site for load class D. The reinforcement drawings are available from KESSEL. 20 year polyethylene warranty.

#### Variant

Direction of flow:	right
Chamber system:	Twin walled re-enforced pipe chamber
Disposal variant:	Direct
Shredder-Mix-System:	no
Nominal size (NS):	7,00
SonicControl:	no
Disposal system:	Disposal connection
Type of disposal:	manual with suction hose

Load-bearing capacity (DIN 19901):	E2
<b>Dimensions</b>	
Net weight:	1140 kg
Gross weight:	1194 kg
Groundwater resistant from lower edge of base section:	2560 mm
Installation depth:	550 - 960 mm
Length:	2160 mm
Width:	2505 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
<b>Tank/drain body</b>	
Pressure pipe connection (DN):	90
Pressure pipe connection (OD):	90 mm
Distance pipe bottom outlet to tank bottom:	1330 mm
Distance pipe bottom inlet to tank bottom:	1600 mm
Outlet nominal size (OD):	160 mm
Number of outlets:	1
Outlet nominal size (DN):	150 mm
Inlet nominal size (OD):	160 mm
Inlet nominal size (DN):	150 mm
Number of inlets:	1
Connection inlet/outlet sockets:	PE-HD pipes in accordance with DIN 19537, PVC-KG pipes in accordance with DIN 19534, PP or AS
Clear width of entry (LW):	600 mm
<b>Coverage features</b>	
Type of cover:	Cover plate
Cover material:	Grey iron
Colour of cover:	black
Height of cover:	95 mm
Locking:	unlocked
Load class:	B 125 (EN 124)
Tightness:	odour-tight and surface water resistant
<b>Wastewater contents</b>	
Separator contents:	1440 l
Max. grease layer thickness:	195 mm
Total volume:	2140 l
Contents of sludge trap:	700 l
Storage quantity of grease:	280 l
<b>Pumping device</b>	
Pump:	GTK 1300
Number of pumps:	2
Weight, pump:	27 kg
Rated current:	2,5 A

Protection class:	I
Insulation class:	H
Cos phi - power factor:	0,8
Protection class (pump):	IP 68
Max. temperature (permanent) of conveyed material:	40 °C
Max. pumping capacity:	57 m <sup>3</sup> /h
Max. pumping height:	12,4 m
Speed:	2900 U/min
Power P1:	1,3 kW
Power P2:	1 kW
Operating mode:	S3 - 30 %
Type of fuse required (electrical protection):	3 x C 16 A
Type of pump connection cable:	H07RN8-F 6G 1.5 mm <sup>2</sup>
Length of mains cable for pump:	10 m
Control	
Control unit:	Comfort
Motor protection switch:	yes
Alarm sensor:	Level sensor
Level measurement instrument:	Level sensor
Type of level measurement:	hydrostatic
Protection class control unit:	IP 54
Mains frequency:	50 Hz
Operating voltage:	400 V
Potential-free contact:	yes
GSM interface:	yes
Log book function:	yes
Multi-line display:	yes
Battery buffering:	yes
Self-diagnosis system (SDS):	yes
Type of fuse required (electrical protection):	3 x C 16 A