

## Shower channel upper section *Linearis Comfort*

System 125

with cover and rim in stainless steel AISI 304

Made in ABS

Minimum installation height of upper section excl. drain body 46 mm, with removable odour trap, installation supports and with factory-mounted waterproofing membrane according to EN 1253-1 and DIN 18534-1-W3-I.


Drainage capacity 1.1 l/sec / 1.0 l/sec with 10 mm / without threshold.

Sealing water height 50 mm

### Cover:

Cover and rim in stainless steel AISI 304 (Channel cover can be reversed and tiled on site), for tile thickness 7 – 22 mm, class K 3, with seeping water opening

**Note:** Drain bodies see page below; also in combination with drain bodies *Ferrofix* system 125

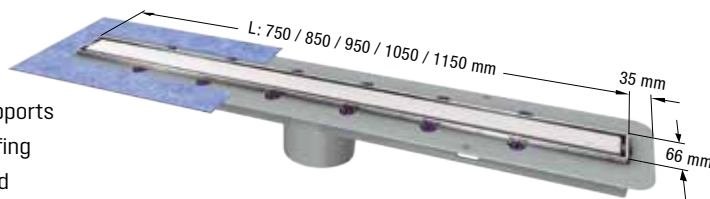




Channel length in mm	Art. no.
With factory-mounted waterproofing membrane	
750	48 928M
850	48 929M
950	48 930M
1050	48 931M
1150	48 932M

## Accessories

*Linearis Comfort*

### Drain bodies *Ecoguss* / *Practicus*

with removable odour trap\*



#### *Ecoguss* with connection flange lateral outlet

Material: *Ecoguss*

Sealing water height: 50 mm

Ø 58	B×H 245×120 mm	Art. no. 48 358
Ø 78	B×H 134×109 mm	Art. no. 48 378
Ø 83	B×H 134×108 mm	Art. no. 48 383
Ø 110	B×H 148×92 mm	Art. no. 48 311

#### *Ecoguss* with connection flange vertical outlet

Material: *Ecoguss*

Sealing water height: 50 mm


Ø 58	H 100 mm	Art. no. 48 458
Ø 78	H 110 mm	Art. no. 48 478
Ø 83	H 110 mm	Art. no. 48 483
Ø 110	H 110 mm	Art. no. 48 411

#### *Practicus* with connection flange lateral outlet

Material: PP

Sealing water height: 50 mm

Ø 50	B×H 245×120 mm	Art. no. 45 150
Ø 75	B×H 134×109 mm	Art. no. 45 170
Ø 110	B×H 148×92 mm	Art. no. 45 110



#### *Practicus* with connection flange vertical outlet



Material: PP

Sealing water height: 50 mm

Ø 50	H 100 mm	Art. no. 45 250
Ø 75	H 110 mm	Art. no. 45 270
Ø 110	H 110 mm	Art. no. 45 210

### Drain body *The Ultraflat 79*

with non-mounted odour trap for installation in an upper section



#### Lateral outlet Ø 50 without inlet

Sealing water height: 50 mm

Ø 50	Art. no. 44 700
------	-----------------

#### Lateral outlet Ø 50 with inlet Ø 40

Sealing water height: 50 mm

Ø 50	Art. no. 44 701
------	-----------------

\*The *Linearis Comfort* and *Linearis Compact* shower channels already include an odour trap. For this reason, the odour trap must be removed from all drain bodies during installation.