Data sheet

The Superflat bathroom drain glued flange, DN 50, Slotted grating

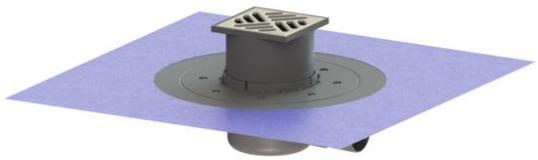

Article information
article number: 42701.91
EAN code: 4026092029657
Price group: 10

Product advantages
- Movable outlet socket
- Lip seal fixed on the drain body
- Side inlet via odour trap

Description
The Superflat bathroom drain is suitable for indoor floor drainage. The drain made of PP is equipped with a secure, reliably installed seal as well as a removable odour trap.

General features

Nominal size (DN)	50
Outer diameter (OD)	50 mm
Odour trap	included

Version

Sealing water height	30 mm
Discharge rate (l/s) with 20 mm threshold	0.8

Dimensions

Vertical adjustment	19|27 mm
Net weight	0.99 kg
Gross weight	1.21 kg
Cutout dimension, width	350 mm
Cutout dimension, length	350 mm
Type of height adjustability	vertically adjustable upper section
Length	332 mm
Width	332 mm
Packaging dimension: length	390 mm
Packaging dimension: width	190 mm
Packaging dimension: height	310 mm

Tank/drain body

Number of outlets	1
Inlet nominal size (DN)	40
Number of inlets	1
Material of drain body	PP

Coverage features

Type of cover	Slotted cover
Cover material	Stainless steel 14301
Colour of cover	silver
Width of cover	100 mm
Length of cover	100 mm
Min. flooring height	19 mm
Frame material	PP
Locking	placed
Load class	K 3 (EN 1253-1)
Rim width	107 mm
Rim length	107 mm
Max. flooring height	27 mm
Upper section material	PP