Data sheet

Staufix clean out DN 150, Floor slab, tileable

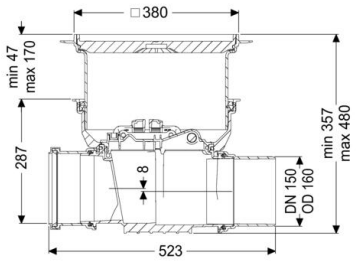

Article information

article number: 700150.10X
EAN code: 4026092075968
Price group: 10

Product advantages

- Simple conversion to Staufix type 1
- Own gradient only 8 mm
- Quick and toolless access for cleaning

Description

The clean out for faecal and faecal-free wastewater makes easy access to wastewater pipes possible for inspection and maintenance work. Thanks to the modular KESSEL system, existing systems can easily be supplemented by up to two flaps and one emergency closure or be converted to the StaufixControl backwater valve.

General features

Colour	black
Nominal size (DN)	150
Outer diameter (OD)	160 mm
Type of wastewater	for wastewater with and without sewage
Installation situation	floor slab installation
Delivery state	Installation-ready (connection parts must be connected on site)
Tightness	surface water resistant

Dimensions

Net weight	7.6 kg
Gross weight	10.2 kg
Groundwater resistant from lower edge of base section	3 mm
Cutout dimension, width	750 mm
Cutout dimension, length	750 mm
Vertical drop between inlet and outlet	8 mm
Installation depth	341|464 mm
Type of height adjustability	vertically adjustable upper section
Length	523 mm
Width	444 mm
Packaging dimension: length	586 mm
Packaging dimension: width	486 mm
Packaging dimension: height	496 mm

Coverage features

Type of cover	tileable cover plate
Cover material	Polymer
Width of cover	366 mm
Length of cover	366 mm
Locking	Lock & Lift
Load class	K 3 (EN 1253-1)
Tightness	surface water resistant
Max. flooring height	18 mm