Data sheet

# Ferrofix box channel  tile connect. angle profile, 400x3050mm

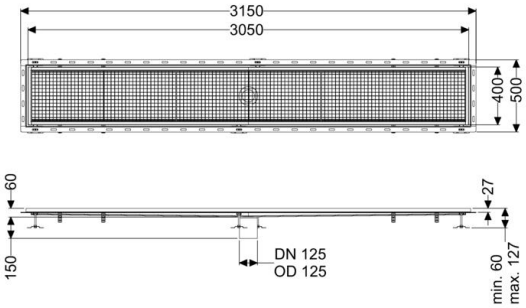


## Article information

article number: 6340300
EAN code: 4026092099292
Price group: 80

## Product advantages

- The channel profile is suitable for installation situations with high thermal loads
- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

## Description

The Ferrofix box channel made of stainless steel with a material thickness of 2.0 mm (pickled in the immersion bath) is equipped with polished visible ridges, longitudinal and transverse slopes, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for installation situations with high thermal loads. The tile connection angle profile protects against tile breakage at the edge.

## General features

| | |
|---|---|
| Nominal size (DN) | 125 |
| Outer diameter (OD) | 125 mm |

## Version

| | |
|---|---|
| Waterproofing layer on the upper section | Tile connection angle |

## Dimensions

| | |
|---|---|
| Vertical adjustment | \| |
| Net weight | 61 kg |
| Gross weight | 61 kg |
| Length | 3050 mm |
| Width | 400 mm |
| Height | 60 mm |
| Packaging dimension: length | 0 mm |
| Packaging dimension: width | 0 mm |
| Packaging dimension: height | 0 mm |

## Coverage features

| | |
|---|---|
| Type of cover | Slotted cover |
| Colour of cover | silver |
| Locking | placed |
| Load class | L 15 (EN 1253-1) |
| Slip resistance class | R12 according to DIN 51130; C according to DIN 51097 |
| Upper section material | Stainless steel 14301 |