


Grease separator EasyClean free NS 20, Standard, right

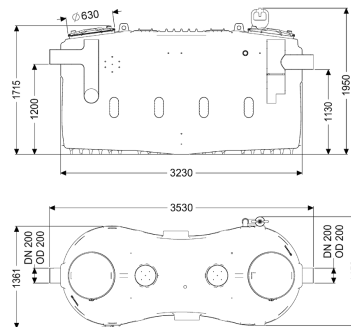

Article information

Item no.: 93020-01-R
 GTIN: 4026092105245
 Price group: 60

Advantages

- Inspection window and Refill inlet as standard
- Can be retrofitted up to Auto Mix & Pump
- Low-maintenance operation

Description

The separator for greasy wastewater is suitable for free-standing set-up in frost-protected rooms and comes without metallic components in the tank. The collecting tank made of permanently resistant polymer (PE) is equipped with an integrated sludge trap and has a tapered base for fast and clean disposal. Two odour-tight covers with quick-release closures make easy access possible for cleaning and maintenance work. Manual disposal is carried out with the tank open. 20 year polyethylene warranty.

Variant

| | |
|---|--------------------------|
| Direction of flow: | right |
| Disposal variant: | Standard |
| Shredder-Mix-System: | no |
| Inspection window: | yes |
| Nominal size (NS): | 20 |
| SonicControl: | no |
| Refill inlet in accordance with DIN 1988: | yes |
| Type of disposal: | manual with suction hose |

General characteristics

| | |
|-------------------------|---|
| Installation situation: | free-standing installation |
| Delivery state: | Installation-ready (connection parts must be connected on site) |

Dimensions

| | |
|-------------|--------|
| Net weight: | 355 kg |
|-------------|--------|

| | |
|-------------------------------|---------|
| Gross weight: | 430 kg |
| Set-up area, length: | 3530 mm |
| Set-up area, width: | 1730 mm |
| Set-up area, height: | 1950 mm |
| Required access area, length: | 3530 mm |
| Required access area, width: | 1490 mm |
| Required access area, height: | 1950 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

| | |
|---|---------|
| Tank/drain body | |
| Distance pipe bottom outlet to tank bottom: | 1130 mm |
| Distance pipe bottom inlet to tank bottom: | 1200 mm |
| Outlet nominal size (OD): | 200 mm |
| Outlet nominal size (DN): | 200 mm |
| Inlet nominal size (OD): | 200 mm |
| Inlet nominal size (DN): | 200 mm |

| | |
|-------------------|-------------|
| Coverage features | |
| Type of cover: | Cover |
| Cover material: | Polymer |
| Colour of cover: | violet |
| Tightness: | odour-tight |

| | |
|------------------------------|--------|
| Wastewater contents | |
| Separator contents: | 1730 l |
| Max. grease layer thickness: | 235 mm |
| Total volume: | 3730 l |
| Contents of sludge trap: | 2000 l |
| Storage quantity of grease: | 800 l |